


Parallel grippers HGPT-B, heavy-duty

FESTO

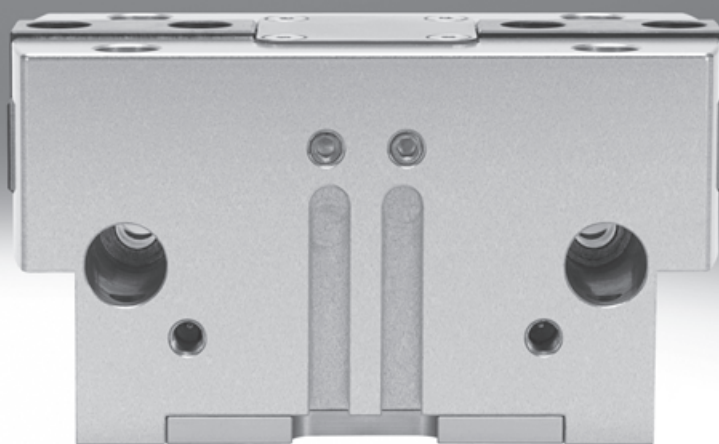

Parallel grippers HGPT-B, heavy-duty

Key features

FESTO

Advantages compared with the parallel gripper HGPT

- **Space-optimised:**
Choice of shorter housing without gripping force retention or longer housing with gripping force retention
- **Increased gripping force/high-force variant:**
Gripping force increased by 30% by means of oval piston.
High-force variant also available: half the stroke, twice the force
- **Reduced weight:**
Systematic use of lighter and higher performance materials
- **4 sensor slots:**
Proximity sensors no longer project past the bottom of the housing.
Up to four positions can be sensed with the proximity sensors

At a glance

General information

Sturdy and precise kinematic system for maximum torque absorption and long service life.
The force generated by the linear motion is translated into the gripper jaw movement via a wedge mechanism

with guided motion sequence.
This also guarantees synchronous movement of the gripper jaws.
The virtually backlash-free plain-bearing guide is realised using ground-in gripper jaws.


Flexible range of applications

A wide range of uses:

- Can be used as either a double-acting or single-acting gripper
- Compression spring for supplementary or retaining gripping forces
- Suitable for external and internal gripping
- Centring either via centring pins or centring sleeves

The technology in detail

Gripper closed




Gripper open



- 1 Gripper jaw
- 2 Wedge with restricted guidance
- 3 Piston with magnet


Additional connections

For sealing air



Compressed air flows past the gripper jaw when sealing air (max. 0.5 bar) is connected.
This prevents, for example, dust particles from entering the gripper jaw guides.

For lubrication



The connections can also be used for relubricating the guide.

Position sensing/force control

With position transmitter SMAT-8M/SDAT



Analogue positional feedback possible

- Analogue output
 - 0 ... 10 V
 - 4 ... 20 mA

With proportional pressure regulator VPPM



Infinite adjustment of the gripping force possible

- Setpoint input
 - 0 ... 10 V
 - 4 ... 20 mA

With proximity sensor SMT-8G/-10G



Multiple positions can be sensed:

- Open
- Closed
- Workpiece gripped

Parallel grippers HGPT-B, heavy-duty


Key features

FESTO

Wide range of supply ports


Direct

From the front



Via adapter plate

From underneath




1 Supply ports


Mounting options

Direct mounting

From above

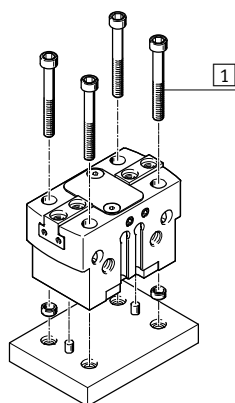

From underneath or from the side

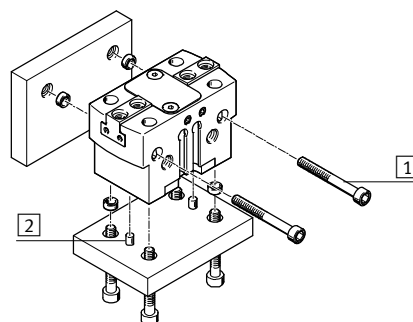


1 Mounting screws

2 Centring pins, centring sleeves



Note

These grippers are not suitable or are of limited suitability for the following application examples:

Not suitable for:



Of limited suitability for:




- Machining with sealing air possible
- Aggressive media only possible after consultation with Festo

Parallel grippers HGPT-B, heavy-duty

Key features

FESTO

System product for handling and assembly technology

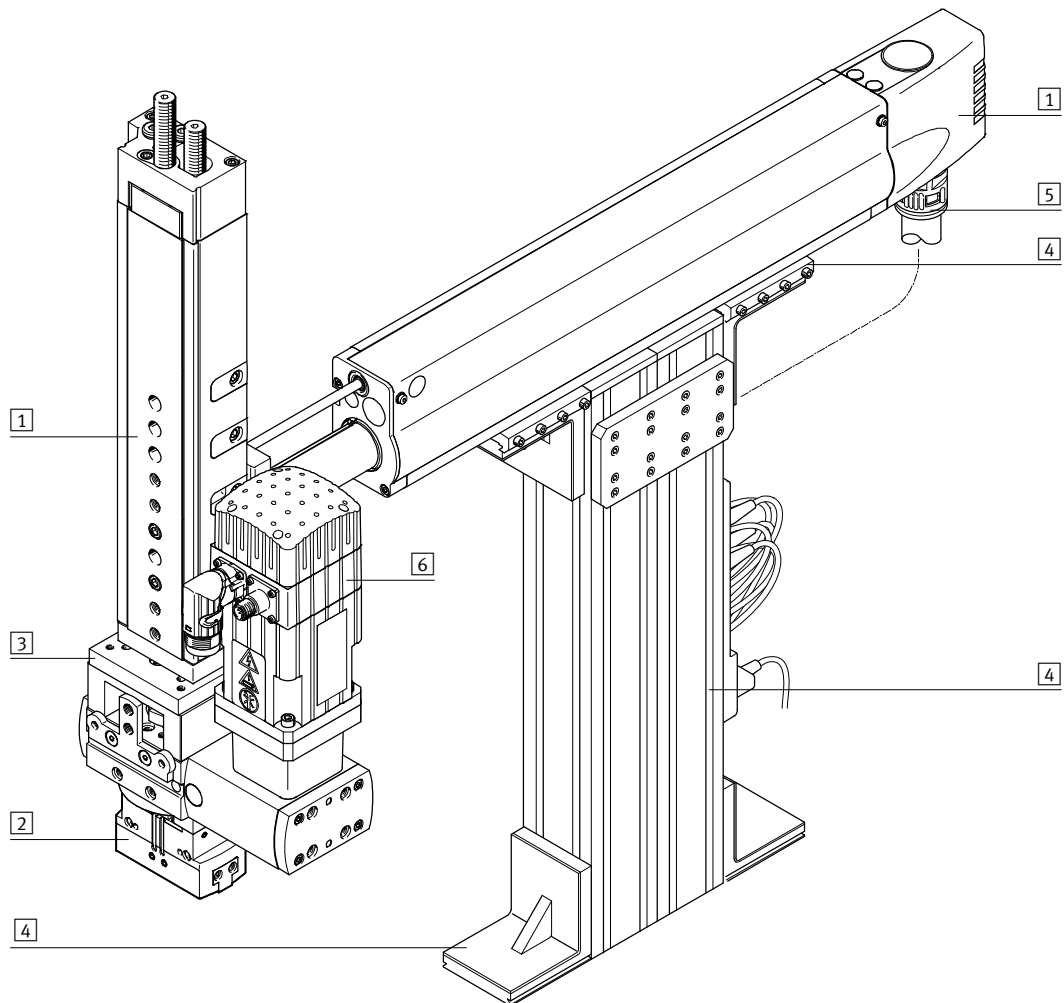

System components and accessories		
	Brief description	→ Page/Internet
1 Drives	Wide range of combinations possible within handling and assembly technology	drive
2 Grippers	Wide range of variations possible within handling and assembly technology	gripper
3 Adapters	For drive/drive and drive/gripper connections	adapter kit
4 Basic components	Profiles and profile connections as well as profile/drive connections	basic component
5 Installation components	For a clear, safe layout of electrical cables and tubing	installation component
6 Motors	Servo and stepper motors, with or without gearing	motor
– Axes	Wide range of combinations possible within handling and assembly technology	axis



Parallel grippers HGPT-B, heavy-duty

Peripherals overview


FESTO

Peripherals overview

System product for handling and assembly technology

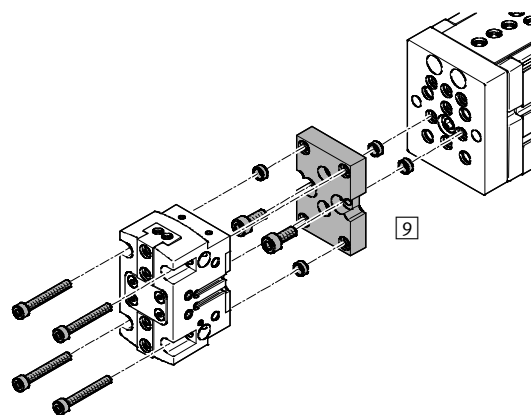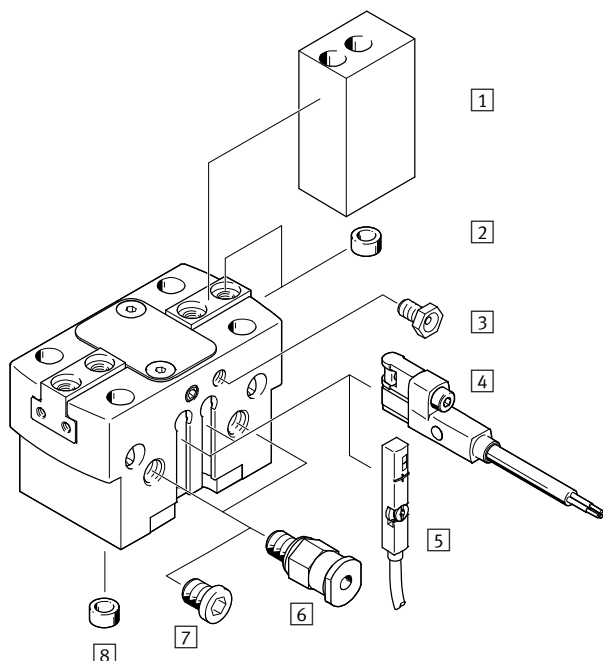

Proportional pressure regulator VPPM



Accessories				
Type	Size	Description	→ Page/Internet	
1 Gripper jaw blank BUB-HGPT	16 ... 80	Blank specially matched to the gripper jaws for custom production of gripper fingers	LEERER MERKER	
2 Centring sleeve ZBH	16 ... 80	- For centring gripper jaw blanks/gripper fingers on the gripper jaws - Centring sleeves are included in the scope of delivery of the gripper	23	
3 Lubrication nipple	16 ... 80	Included in the scope of delivery of the gripper	–	
4 Proximity sensor SMT-8G/-10G	16 ... 80	- For sensing the piston position - The proximity sensor is flush with the housing at the bottom	24	
5 Position transmitter SMAT-8M	40 ... 80	Continuously senses the position of the piston. It has an analogue output with an output signal that is proportional to the piston position	24	
Position transmitter SDAT	63, 80			
6 Push-in fitting QS	16 ... 80	For connecting compressed air tubing with standard O.D.	qs	
7 Blanking plug B	16 ... 80	For sealing the supply ports when using the lower supply ports	23	
8 Centring sleeve ZBH	16 ... 80	For centring the gripper during mounting	23	
9 Adapter kit DHAA, HAPG	16 ... 80	Drive/gripper connections	19	
10 Proportional pressure regulator VPPM	16 ... 80	For infinite adjustment of the gripping force	vppm	

Parallel grippers HGPT-B, heavy-duty

Type codes

FESTO


		HGPT	–	16	–	A	–	B	–	F	–	
Type												
HGPT	Parallel gripper											
Size												
Position sensing												
A	Via proximity sensor											
Variant												
B	B series											
Force variant												
F	High force											
Gripping force retention												
G1	Opening											
G2	Closing											

Parallel grippers HGPT-B, heavy-duty

FESTO

Technical data

Function
Double-acting
HGPT-...



⌀ - Size
16 ... 80 mm

┃ - Total stroke
3 ... 50 mm

Function – Variants
Single-acting or
with gripping force retention ...
... opening HGPT-...-G1



... closing HGPT-...-G2



General technical data										
Size		16	20	25	35	40	50	63	80	
Design		Wedge mechanism								
		Guided motion sequence								
Mode of operation		Double-acting								
Gripper function		Parallel								
Number of gripper jaws		2								
Max. mass per external gripper finger ¹⁾		[g]	40	50	110	180	310	640	1260	1830
Stroke per gripper jaw	HGPT-...-A	[mm]	3	4	6	8	10	12	16	25
	HGPT-...-A-F	[mm]	1.5	2	3	4	5	6	8	12.5
Pneumatic connection			M5	M5	M5	M5	M5	G1/8	G1/8	G1/4
Pneumatic connection, sealing air			M3	M3	M5	M5	M5	M5	M5	M5
Repetition accuracy ²⁾		[mm]	±0.01	±0.02		±0.025				
Max. interchangeability		[mm]	0.2							
Max. operating frequency		[Hz]	3					2		
Rotational symmetry		[mm]	< Ø 0.2							
Position sensing			Via proximity sensor, position transmitter							
Type of mounting			Via through-hole and locating pin/centring sleeve							
			Via female thread and locating pin/centring sleeve							
Mounting position			Any							

1) Valid for unthrottled operation

2) End-position drift under constant conditions of use with 100 consecutive strokes in the direction of movement of the gripper jaws

• Note: This product conforms to ISO 1179-1 and to ISO 228-1

Operating and environmental conditions			
Min. operating pressure	HGPT-...-A	[bar]	3
	HGPT-...-A-G	[bar]	4
Max. operating pressure		[bar]	8
Operating pressure, sealing air		[bar]	0 ... 0.5
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]		
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)		
Ambient temperature ¹⁾		[°C]	+5 ... +60
Protection type	IP40		
Corrosion resistance class CRC ²⁾	2		

1) Note operating range of proximity sensors.

2) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Parallel grippers HGPT-B, heavy-duty


Technical data

FESTO

Weight [g]								
Size	16	20	25	35	40	50	63	80
HGPT-...-A	85	135	266	490	821	1400	2712	4745
HGPT-...-A-F	85	135	266	490	821	1400	2712	4745
HGPT-...-A-G	100	155	353	567	1075	1832	3562	6287


Materials

Sectional view

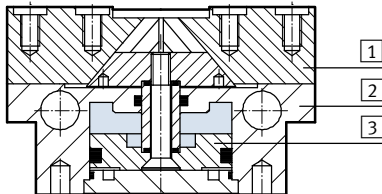

Parallel gripper	
1 Gripper jaw	Hardened steel
2 Housing	Hard anodised wrought aluminium alloy
3 Piston	Hard anodised aluminium
– Seals	Nitrile rubber
– Note on materials	Free of copper and PTFE
	RoHS-compliant

Gripping force [N] at 6 bar




Size		16	20	25	35	40	50	63	80
Gripping force per gripper jaw									
HGPT-...-A	Opening	60	82	133	245	355	570	896	1613
	Closing	53	77	124	229	331	535	851	1551
HGPT-...-A-F	Opening	108	172	238	500	723	1185	1885	3275
	Closing	96	161	221	467	674	1113	1791	3150
Total gripping force									
HGPT-...-A	Opening	120	162	266	490	710	1140	1792	3226
	Closing	106	154	248	458	662	1070	1702	3102
HGPT-...-A-F	Opening	216	344	476	1000	1446	2370	3770	6550
	Closing	192	322	442	934	1328	2226	3522	6300

Parallel grippers HGPT-B, heavy-duty

FESTO

Technical data

Characteristic load values at the gripper jaws




The indicated permissible forces and torques apply to a single gripper jaw. They include the lever arm, additional applied loads due to the workpiece or gripper fingers and acceleration

forces occurring during movement. The zero co-ordinate line (gripper jaw guide) must be taken into consideration for the calculation of torques.

Size		16	20	25	35	40	50	63	80
Max. permissible force F_z	[N]	200	700	1200	1800	2500	3200	5000	7000
Max. permissible torque M_x	[Nm]	10	15	50	80	100	120	160	180
Max. permissible torque M_y	[Nm]	12	15	45	60	90	120	180	220
Max. permissible torque M_z	[Nm]	6	8	35	50	75	100	140	170


Mass moment of inertia [$\text{kgm}^2 \times 10^{-4}$]



Mass moment of inertia of the parallel gripper in relation to the central axis, without external gripper fingers, without load.

Size		16	20	25	35	40	50	63	80
HGPT-...-A		0.141	0.344	0.983	2.807	7.277	19.488	60.903	150.515
HGPT-...-A-G		0.163	0.445	1.479	3.974	10.990	29.423	93.034	238.336

Gripper jaw backlash



With grippers, backlash occurs between the gripper jaws and the housing due to the plain-bearing guide. The backlash values listed in the table have been calculated based on the traditional accumulative tolerance method.

Size		16	20	25	35	40	50	63	80
Max. gripper jaw backlash S_z	[mm]	0.02							
Max. gripper jaw angular backlash a_x, a_y	[°]	0.1							

Parallel grippers HGPT-B, heavy-duty


Technical data

FESTO

Opening and closing times [ms] at 6 bar

Without external gripper fingers

With external gripper fingers

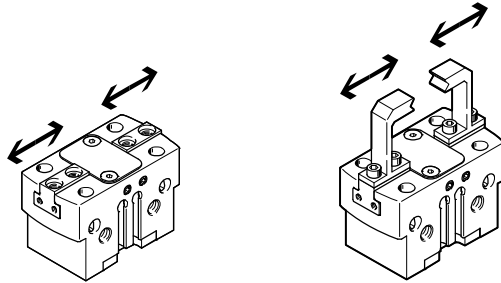

The indicated opening and closing times [ms] have been measured at room temperature at an operating pressure of 6 bar with horizontally mounted gripper without additional

gripper fingers. The grippers must be throttled for greater loads [g]. Opening and closing times must then be adjusted accordingly.

Size			16	20	25	35	40	50	63	80
Without external gripper fingers										
Standard	HGPT-...-A	Opening	9	22	26	36	56	80	150	214
		Closing	11	30	32	67	60	85	156	213
	HGPT-...-A-G1	Opening	13	13	24	37	67	70	146	182
		Closing	31	25	48	114	135	153	328	353
	HGPT-...-A-G2	Opening	22	35	40	69	122	151	294	379
		Closing	15	18	28	87	71	77	185	176
High force	HGPT-...-A-F	Opening	8	28	25	33	60	83	143	212
		Closing	10	31	32	70	64	82	152	211
	HGPT-...-A-F-G1	Opening	19	13	24	35	71	70	145	180
		Closing	30	25	45	115	143	143	315	340
	HGPT-...-A-F-G2	Opening	33	38	36	63	120	137	308	362
		Closing	17	14	28	72	72	80	154	178
With external gripper fingers (as a function of the load per gripper finger)										
HGPT-...		50 g	10	–	–	–	–	–	–	–
		100 g	15	30	–	–	–	–	–	–
		200 g	21	42	35	–	–	–	–	–
		300 g	–	52	42	42	–	–	–	–
		400 g	–	–	49	49	63	–	–	–
		500 g	–	–	–	55	71	–	–	–
		600 g	–	–	–	–	78	–	–	–
		800 g	–	–	–	–	90	90	–	–
		1000 g	–	–	–	–	–	95	–	–
		1200 g	–	–	–	–	–	100	–	–
		1500 g	–	–	–	–	–	–	164	–
		1800 g	–	–	–	–	–	–	179	–
		2000 g	–	–	–	–	–	–	189	223
		2200 g	–	–	–	–	–	–	–	234
		2400 g	–	–	–	–	–	–	–	244


Parallel grippers HGPT-B, heavy-duty

FESTO

Technical data

Gripping force F_H per gripper jaw as a function of operating pressure and lever arm x

The gripping forces as a function of operating pressure and lever arm can be determined from the following graphs.




— 3 bar
- - - 6 bar
- · - 8 bar

Note
Gripper selection
sizing software
→ www.festo.com


External gripping (closing)

Standard


HGPT-16-A




HGPT-20-A




HGPT-25-A




HGPT-35-A




HGPT-40-A




HGPT-50-A



HGPT-63-A




HGPT-80-A




High force


HGPT-16-A-F




HGPT-20-A-F




HGPT-25-A-F




HGPT-35-A-F




HGPT-40-A-F




HGPT-50-A-F



HGPT-63-A-F



HGPT-80-A-F




Parallel grippers HGPT-B, heavy-duty

Technical data

FESTO

Gripping force F_H per gripper jaw as a function of operating pressure and lever arm x

The gripping forces as a function of operating pressure and lever arm can be determined from the following graphs.



— 3 bar
- - - 6 bar
- · - 8 bar



Note


Gripper selection
sizing software

→ www.festo.com


Internal gripping (opening)

Standard


HGPT-16-A




HGPT-20-A




HGPT-25-A




HGPT-35-A




HGPT-40-A




HGPT-50-A



HGPT-63-A




HGPT-80-A




High force


HGPT-16-A-F




HGPT-20-A-F




HGPT-25-A-F




HGPT-35-A-F




HGPT-40-A-F




HGPT-50-A-F



HGPT-63-A-F



HGPT-80-A-F



Parallel grippers HGPT-B, heavy-duty

Technical data


FESTO

Gripping force F_H per gripper jaw at 6 bar as a function of lever arm x and eccentricity a and b

The following formula must be used to calculate the lever arm x with eccentric gripping:

$$x = \sqrt{a^2 + b^2}$$

The gripping force F_H can then be read from the graphs (→ from page 11) using the calculated value x .

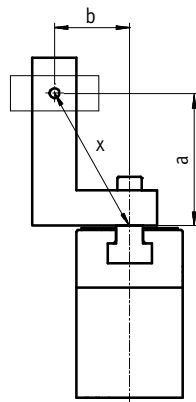

Calculation example

Given:

Distance $a = 45$ mm

Distance $b = 40$ mm

To be calculated:

The gripping force at 6 bar,
with an HGPT-25,
used as an external gripper


Procedure:

Calculate the lever arm x

$$x = \sqrt{45^2 + 40^2}$$

$$x = 60$$
 mm

The graph (→ page 11) gives a value of $F_H = 89$ N for the gripping force.

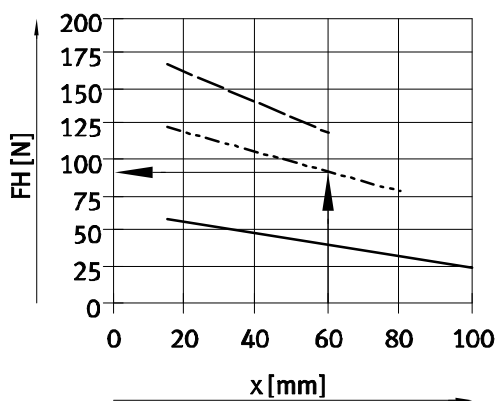

Parallel grippers HGPT-B, heavy-duty


Technical data

FESTO

Spring force F_f as a function of size, gripper jaw stroke l

Gripping force retention for HGPT-...-G...


The spring forces F_f as a function of gripper jaw stroke l can be determined from the following graph.



Standard

HGPT-...-A-G

Size 16 ... 35

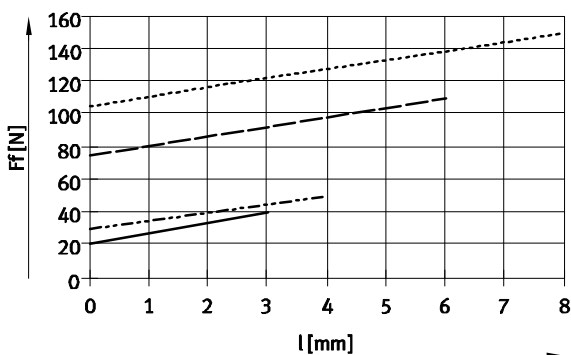


— HGPT-16-A-G
 - - - HGPT-20-A-G
 - · - HGPT-25-A-G
 · · · HGPT-35-A-G

High force


HGPT-...-A-F-G

Size 16 ... 35

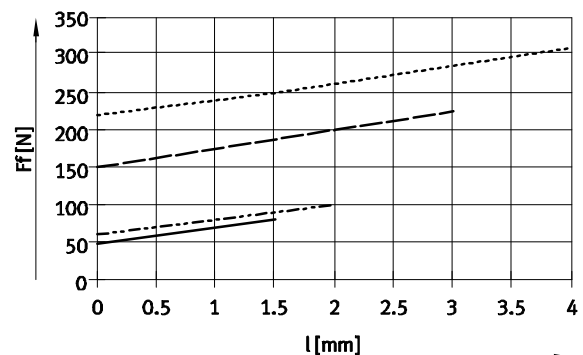


— HGPT-16-A-F-G
 - - - HGPT-20-A-F-G
 - · - HGPT-25-A-F-G
 · · · HGPT-35-A-F-G

Size 40 ... 80

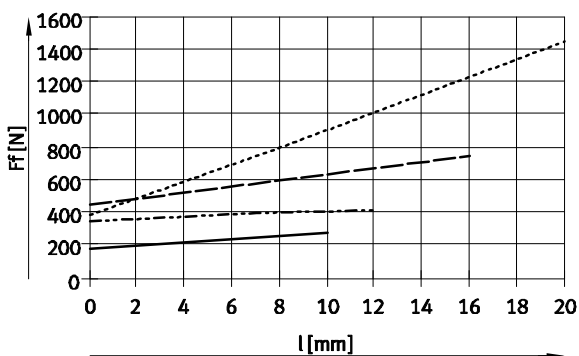

— HGPT-40-A-G
 - - - HGPT-50-A-G
 - · - HGPT-63-A-G
 · · · HGPT-80-A-G

Size 40 ... 80

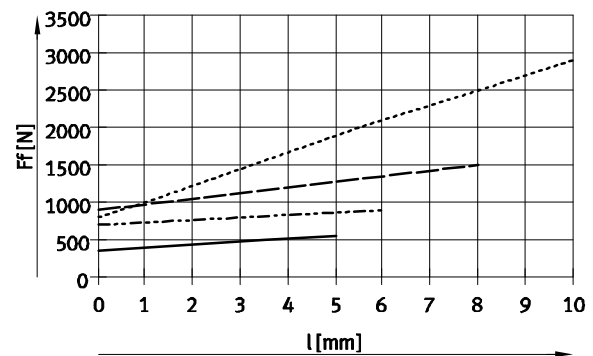

— HGPT-40-A-F-G
 - - - HGPT-50-A-F-G
 - · - HGPT-63-A-F-G
 · · · HGPT-80-A-F-G

Parallel grippers HGPT-B, heavy-duty

Technical data

FESTO

Spring force F_F as a function of size, gripper jaw stroke l and lever arm x per gripper finger

The lever arm x must be taken into consideration when determining the actual spring force F_{Ftotal} .

The formulae for calculating the spring force are provided in the table below.

Standard – HGPT-...-A-G

Gripping force retention	Size	$F_{Ftotal} =$	Gripping force retention	Size	$F_{Ftotal} =$
G1	16	$-0.1 * x + 0.7 * F_F$	G2	16	$-0.2 * x + 0.7 * F_F$
	20	$-0.05 * x + 0.9 * F_F$		20	$-0.65 * x + 0.9 * F_F$
	25	$-0.7 * x + 0.7 * F_F$		25	$-0.55 * x + 0.7 * F_F$
	35	$-0.65 * x + 0.7 * F_F$		35	$-0.05 * x + 0.7 * F_F$
	40	$-1.05 * x + 0.8 * F_F$		40	$-1.05 * x + 0.8 * F_F$
	50	$-0.75 * x + 0.8 * F_F$		50	$-1.4 * x + 0.8 * F_F$
	63	$-2 * x + 0.8 * F_F$		63	$-1.2 * x + 0.8 * F_F$
	80	$-1.4 * x + 0.6 * F_F$		80	$-0.6 * x + 0.6 * F_F$

High force – HGPT-...-A-F-G

Gripping force retention	Size	$F_{Ftotal} =$	Gripping force retention	Size	$F_{Ftotal} =$
G1	16	$-0.6 * x + 0.6 * F_F$	G2	16	$-0.4 * x + 0.6 * F_F$
	20	$-0.7 * x + 0.75 * F_F$		20	$-0.95 * x + 0.75 * F_F$
	25	$-0.85 * x + 0.9 * F_F$		25	$-0.5 * x + 0.9 * F_F$
	35	$-0.4 * x + 0.55 * F_F$		35	$-0.4 * x + 0.55 * F_F$
	40	$-1.9 * x + 0.75 * F_F$		40	$-2.3 * x + 0.75 * F_F$
	50	$-2.5 * x + 0.7 * F_F$		50	$-1 * x + 0.7 * F_F$
	63	$-5.5 * x + 0.7 * F_F$		63	$-1 * x + 0.7 * F_F$
	80	$-5.65 * x + 0.8 * F_F$		80	$-0.5 * x + 0.8 * F_F$

Determination of the actual gripping forces F_{Gr} for HGPT-...-G1 and HGPT-...-G2 as a function of the application

The parallel grippers with integrated spring type HGPT-...-G1 (opening gripping force retention) and HGPT-...-G2 (closing gripping force retention) can be used as:

- single-acting grippers

- grippers with supplementary gripping force and
- grippers with gripping force retention depending on requirements.

In order to calculate available gripping forces F_{Gr} (per gripper jaw), the gripping force (F_H) and spring

force (F_{Ftotal}) must be combined accordingly.

Application

Single-acting	Supplementary gripping force	Gripping force retention
- Gripping with spring force: $F_{Gr} = F_{Ftotal}$ - Gripping with pressure force: $F_{Gr} = F_H - F_{Ftotal}$	Gripping with pressure and spring force: $F_{Gr} = F_H + F_{Ftotal}$	Gripping with spring force: $F_{Gr} = F_{Ftotal}$


Parallel grippers HGPT-B, heavy-duty

Technical data

FESTO

Dimensions

Download CAD data → www.festo.com

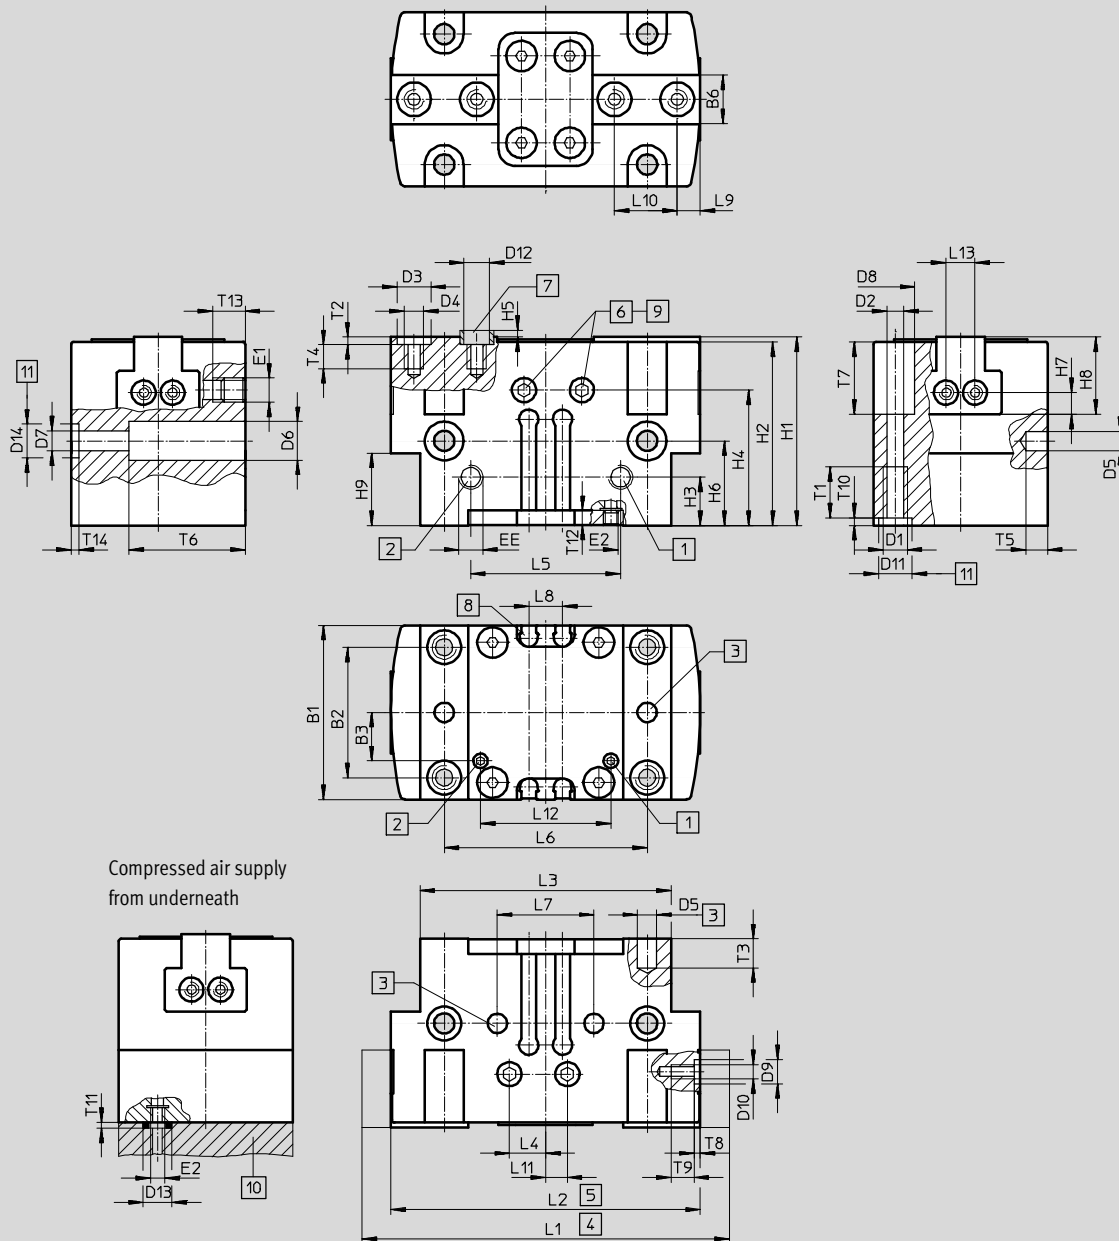

- | | | |
|--|--|--|
| 1 Supply port opening, either on the side or underneath (bottom port sealed on delivery) | 3 Hole for dowel pin (not included in the scope of delivery) | 8 Slot for proximity sensor |
| 2 Supply port closing, either on the side or underneath (bottom port sealed on delivery) | 4 Gripper jaw open | 9 Lubrication nipple (sealed on delivery) |
| | 5 Gripper jaw closed | 10 O-ring for parallel gripper HGPT-16 ... 40: $\varnothing$ 3x1.5 |
| | 6 Sealing air port (sealed on delivery) | HGPT-50 ... 80: $\varnothing$ 5x1.5 |
| | 7 Centring sleeves ZBH (4 included in the scope of delivery) | 11 Hole for centring sleeve ZBH |

Parallel grippers HGPT-B, heavy-duty

Technical data

FESTO

Size	B1	B2 ¹⁾	B3	B6 -0.05 -0.1	D1	D2 Ø	D3 Ø H8/h7	D4	D5 Ø H8	D6 Ø ±0.1	D7 Ø	D8 Ø +0.3	D9 Ø H8	D10	D11 Ø H8	D12 Ø
[mm]	±0.05		±0.1													
16	24	17	4	6	M3	2.6	5	M3	2	4.6	2.6	4.6	–	M2	5	3.2
20 ²⁾	28	22	8.7	6.5	M4	3.3	5	M3	3	6	3.2	6	5	M3	5	3.2
25	36	27	11	10	M5	4.2	7	M4	4	8	4.2	8	5	M3	7	5.3
35	42	32	13	12	M5	4.2	9	M5	4	9.2	5.3	8	7	M5	7	6.4
40	50	38	17	14	M6	5.1	9	M6	5	11	6.4	9	7	M5	9	6.4
50	60	45	20	15.5	M8	6.8	9	M6	6	13.5	8.4	11	7	M5	12	6.4
63	72	56	24.5	20	M8	6.8	12	M10	6	13.5	8.4	11	7	M5	12	10.3
80	100	70	39.5	22	M10	8.5	15	M12	8	16.5	10.2	13.5	9	M6	12	12.4

Size	D13 Ø	D14 Ø H8/h7	EE	E1	E2	H1		H2		H3		H4		H5	H6 ¹⁾	
						±0.05	-G ±0.05	±0.05	-G ±0.05	±0.1	-G ±0.1		-G		-0.3	-G
16	6	–	M5	M3	M3	29	37	28	36	12	12	23.7	31.7	1.2	17.5	25.5
20	6	–	M5	M3	M3	31	38	30	37	10	15	23	30	1.2	14.5	21.5
25	6	7	M5	M5	M3	39	57	38	56	10	20	28	46	1.4	17.5	35.5
35	6	7	M5	M5	M3	49	67	48	66	12	30	36	54	1.9	20	38
40	6	9	M5	M5	M3	55	81	54	80	15	36	41	67	1.9	25	51
50	8	12	G1/8	M5	M5	63	93	62	92	15	30	47	77	1.9	30	60
63	8	12	G1/8	M5	M5	77	117	76	116	18	26	56	96	2.4	28	68
80	8	12	G1/4	M5	M5	91	133	90	132	22	33	65	107	2.9	34	76

Size	H7 ¹⁾	H8	H9		L1		L2	L3	L4	L5	L6 ¹⁾	L7 ¹⁾	L8	L9 ¹⁾	L10 ¹⁾	L11
			±0.1	-G ±0.1	±0.5	-F ±0.5										
		-0.02					±0.5	±0.1	±0.5	±0.1			+0.1			±0.5
16	2.25	8.5	15	23	50	47	44	36	5.5	20	29	20	6	3	8	1
20	3	12	15	22	64	60	56	44	2.5	24	35	24	6	3.25	12	2.5
25	4.5	16	15	33	76	70	64	52	3.5	31	42	20	7	4.75	13	3.5
35	5.5	19	20	38	96	88	80	64	5.5	40	52	40	7	5.5	16	5.5
40	5.5	22	24	50	120	110	100	80	5.5	49	66	50	10	6.5	20	5.5
50	7.5	25.5	26	56	149	137	125	100	5.5	63	82	60	10	8	24	5.5
63	9	32	32	72	192	176	160	125	5.5	74	100	76	10	9.5	32	5.5
80	11	39	34	77	230	205	180	154	5.5	82	130	100	10	12	40	5.5

Size	L12	L13 ¹⁾	T1	T2	T3	T4	T5	T6	T7		T8	T9	T10	T11	T12	T13	T14
									+0.2	-G +0.2							
	±0.1		min.	+0.1	min.	min.	min.				+0.1		+0.1		min.	min.	+0.1
16	22	6	5.5	1.3	4	5	4	15	14	22	–	3	1.3	1.2	3	5.5	–
20	22.6	6	6.5	1.3	5	5.5	4	19	11	11	1.3	6	1.3	1.2	3	5.5	–
25	29	6	8.5	1.6	6	6.5	4.5	24	15	15	1.3	6	1.6	1.2	3	6.7	1.6
35	39	13	8.5	2.1	6	8.5	4.5	16	19	19	1.6	9	1.6	1.2	3	6.5	1.6
40	47.4	13	10.5	2.1	6	10.5	6	33	20	20	1.6	9	2.1	1.2	4	6.5	2.1
50	61	13	12.5	2.1	8	10.5	6	43	23	23	1.6	9	2.6	1.2	4	6.5	2.6
63	75	13	12.5	2.6	8	15.5	7	55	35	35	1.6	9	2.6	1.2	5	6.5	2.6
80	82	20	15	3.1	10	20	10	70	44	44	2.1	10	2.6	1.2	5.5	5	2.6

1) Tolerance for centring hole ±0.02 mm

Tolerance for thread ±0.1 mm

2) Dowel pins [3] must be used when mounted from below.

– ¶ – Note: This product conforms to ISO 1179-1 and to ISO 228-1

Parallel grippers HGPT-B, heavy-duty

Technical data

FESTO

Ordering data						
Size [mm]	Double-acting without compression spring		Single-acting or with gripping force retention			
	Part No.	Type	Opening Part No.	Type	Closing Part No.	Type
Standard						
16	560192	HGPT-16-A-B	560193	HGPT-16-A-B-G1	560194	HGPT-16-A-B-G2
20	560198	HGPT-20-A-B	560199	HGPT-20-A-B-G1	560200	HGPT-20-A-B-G2
25	560204	HGPT-25-A-B	560205	HGPT-25-A-B-G1	560206	HGPT-25-A-B-G2
35	560210	HGPT-35-A-B	560211	HGPT-35-A-B-G1	560212	HGPT-35-A-B-G2
40	560216	HGPT-40-A-B	560217	HGPT-40-A-B-G1	560218	HGPT-40-A-B-G2
50	560222	HGPT-50-A-B	560223	HGPT-50-A-B-G1	560224	HGPT-50-A-B-G2
63	560228	HGPT-63-A-B	560229	HGPT-63-A-B-G1	560230	HGPT-63-A-B-G2
80	560234	HGPT-80-A-B	560235	HGPT-80-A-B-G1	560236	HGPT-80-A-B-G2
High force						
16	560195	HGPT-16-A-B-F	560196	HGPT-16-A-B-F-G1	560197	HGPT-16-A-B-F-G2
20	560201	HGPT-20-A-B-F	560202	HGPT-20-A-B-F-G1	560203	HGPT-20-A-B-F-G2
25	560207	HGPT-25-A-B-F	560208	HGPT-25-A-B-F-G1	560209	HGPT-25-A-B-F-G2
35	560213	HGPT-35-A-B-F	560214	HGPT-35-A-B-F-G1	560215	HGPT-35-A-B-F-G2
40	560219	HGPT-40-A-B-F	560220	HGPT-40-A-B-F-G1	560221	HGPT-40-A-B-F-G2
50	560225	HGPT-50-A-B-F	560226	HGPT-50-A-B-F-G1	560227	HGPT-50-A-B-F-G2
63	560231	HGPT-63-A-B-F	560232	HGPT-63-A-B-F-G1	560233	HGPT-63-A-B-F-G2
80	560237	HGPT-80-A-B-F	560238	HGPT-80-A-B-F-G1	560239	HGPT-80-A-B-F-G2

Parallel grippers HGPT-B, heavy-duty

Accessories

FESTO




Adapter kit
DHAA, HAPG

Material:
Wrought aluminium alloy
Free of copper and PTFE
RoHS-compliant



Note

The kit includes the individual mounting interface as well as the necessary mounting material.

Permissible drive/gripper combinations with adapter kit					Download CAD data → www.festo.com		
Combination	Drive	Gripper			Adapter kit		
	Size	Size	Mounting option		CRC ¹⁾	Part No.	Type
							
DGSL/HGPT-B	DGSL	HGPT-B			DHAA, HAPG		
	8, 10	16, 20	■	■	2	564957	DHAA-G-G6-8-B8-16
	12, 16	16, 20	■	■		564954	DHAA-G-G6-16-B8-16
	12, 16	25	■	■		564952	DHAA-G-G6-16-B8-25
	20, 25	25, 35	■	■		537175	HAPG-79
	20, 25	40	■	■		564951	DHAA-G-G6-20-B8-40
SLT/HGPT-B	SLT	HGPT-B			DHAA, HAPG		
	6	16	■	–	2	537168	HAPG-74
	10	16, 20	■	–		564957	DHAA-G-G6-8-B8-16
	16	16, 20	■	–		564954	DHAA-G-G6-16-B8-16
	16	25	■	–		564952	DHAA-G-G6-16-B8-25
	20	25, 35	■	–		537175	HAPG-79
	25	35	■	–		564953	DHAA-G-H2-20-B8-35
	25	40	■	–		564951	DHAA-G-G6-20-B8-40
DSM-...-HD/HGPT-B	DSM-...-HD	HGPT-B			DHAA		
	12	16	■	■	2	8079169	DHAA-G-R3-12-B8-16
	12	20	■	■		8079170	DHAA-G-R3-12-B8-20
	16	16	■	■		8079193	DHAA-G-R3-16-B8-16
	16	20	■	■		8079195	DHAA-G-R3-16-B8-20
	25	16	■	■		8079202	DHAA-G-R3-25-B8-16
	25	20	■	■		8079205	DHAA-G-R3-25-B8-20
	25	25	■	■		8079207	DHAA-G-R3-25-B8-25
	32	20	■	■		8079217	DHAA-G-R3-32-B8-20
	32	25	■	■		8079218	DHAA-G-R3-32-B8-25
	32	35	■	■		8079221	DHAA-G-R3-32-B8-35

1) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Parallel grippers HGPT-B, heavy-duty

Accessories

FESTO



Adapter kit
DHAA, HAPG

Material:
Wrought aluminium alloy
Free of copper and PTFE
RoHS-compliant



Note

The kit includes the individual mounting interface as well as the necessary mounting material.

Permissible drive/gripper combinations with adapter kit					Download CAD data → www.festo.com		
Combination	Drive	Gripper	Mounting option		Adapter kit		
	Size	Size			CRC ¹⁾	Part No.	Type
							
DRRD/HGPT-B	DRRD	HGPT-B			DHAA		
	12	16	■	■	2	2449927	DHAA-G-Q11-12-B8/B8G-16
	12	20	■	■		2449921	DHAA-G-Q11-12-B8-20
	16	16	■	■		2091740	DHAA-G-Q11-16-B8/B8G-16
	16	20	■	■		2091577	DHAA-G-Q11-16-B8-20
	16	25	■	■		2090543	DHAA-G-Q11-16-B8-25
	20	25	■	■		2088114	DHAA-G-Q11-20-B8-25
	20	35	■	■		2087524	DHAA-G-Q11-20-B8-35
	25	35	■	■		1731604	DHAA-G-Q11-25-B8-35
	25	40	■	■		1731735	DHAA-G-Q11-25-B8-40
	32	40	■	■		2092070	DHAA-G-Q11-32-B8-40
	35	40	■	■		2114241	DHAA-G-Q11-35-B8-40
	32	50	■	■		2118750	DHAA-G-Q11-32-B8-50
	35, 40	50	■	■		2124990	DHAA-G-Q11-35/40-B8-50
	40	63	■	■		2125264	DHAA-G-Q11-40-B8-63
	50	63	■	■		2424526	DHAA-G-Q11-50-B8-63
	50	80	■	■		2424527	DHAA-G-Q11-50-B8-80
	DRRD	HGPT-B-G			DHAA		
	12	16	■	■	2	2449927	DHAA-G-Q11-12-B8/B8G-16
	12	20	■	■		2800827	DHAA-G-Q11-12-B8G-20
	16	16	■	■		2091740	DHAA-G-Q11-16-B8/B8G-16
	16	20	■	■		2595935	DHAA-G-Q11-16-B8G-20
	16	25	■	■		2596187	DHAA-G-Q11-16-B8G-25
	20	25	■	■		2596248	DHAA-G-Q11-20-B8G-25
	20	35	■	■		2596517	DHAA-G-Q11-20-B8G-35
	25	35	■	■		2597040	DHAA-G-Q11-25-B8G-35
	25	40	■	■		2597322	DHAA-G-Q11-25-B8G-40
	32	40	■	■		2597387	DHAA-G-Q11-32-B8G-40
	35	40	■	■		2597928	DHAA-G-Q11-35-B8G-40
	32	50	■	■		2597428	DHAA-G-Q11-32-B8G-50
	35, 40	50	■	■		2604977	DHAA-G-Q11-35/40-B8G-50
	40	63	■	■		2604813	DHAA-G-Q11-40-B8G-63
	50	63	■	■		2604845	DHAA-G-Q11-50-B8G-63
	50	80	■	■		2604887	DHAA-G-Q11-50-B8G-80
HSP/HGPT-B	HSP	HGPT-B			DHAA, HAPG		
	12	16	■	—	2	564957	DHAA-G-G6-8-B8-16
						540881	HAPG-70-B
	16	16, 20	■	—		564957	DHAA-G-G6-8-B8-16
						540882	HAPG-71-B
	25	16, 20	■	—		564957	DHAA-G-G6-8-B8-16
						540883	HAPG-72-B

1) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Parallel grippers HGPT-B, heavy-duty

Accessories

FESTO






Adapter kit
DHAA, HAPG

Material:
Wrought aluminium alloy
Free of copper and PTFE
RoHS-compliant



Note

The kit includes the individual mounting interface as well as the necessary mounting material.

Permissible drive/gripper combinations with adapter kit					Download CAD data → www.festo.com		
Combination	Drive	Gripper			Adapter kit		
	Size	Size	Mounting option		CRC ¹⁾	Part No.	Type
							
HSW/HGPT-B	HSW	HGPT-B			DHAA, HAPG		
	12	16	■	—	2	564957	DHAA-G-G6-8-B8-16
						540882	HAPG-71-B
	16	16, 20	■	—		564957	DHAA-G-G6-8-B8-16
						540882	HAPG-71-B
EGSL/HGPT-B	EGSL	HGPT-B			DHAA, HAPG		
	45, 55	25	■	■	2	564952	DHAA-G-G6-16-B8-25
	75	40	■	■		564951	DHAA-G-G6-20-B8-40
	75	25, 35	■	■		537175	HAPG-79
ERMB/HGPT-B	ERMB	HGPT-B			DHAA, HAPG		
	20	25	■	■	2	537181	HAPG-SD2-25
	20, 25	35	■	■		537173	HAPG-SD2-23
	25, 32	40	■	■		537184	HAPG-SD2-26
	32	50	■	■		564956	DHAA-G-Q5-32-B8-50
ERMO/HGPT-B	ERMO	HGPT-B			DHAA		
	12	16	■	■	2	8079169	DHAA-G-R3-12-B8-16
	12	20	■	■		8079170	DHAA-G-R3-12-B8-20
	16	16	■	■		8079193	DHAA-G-R3-16-B8-16
	16	20	■	■		8079195	DHAA-G-R3-16-B8-20
	25	16	■	■		8079202	DHAA-G-R3-25-B8-16
	25	20	■	■		8079205	DHAA-G-R3-25-B8-20
	25	25	■	■		8079207	DHAA-G-R3-25-B8-25
	32	20	■	■		8079217	DHAA-G-R3-32-B8-20
	32	25	■	■		8079218	DHAA-G-R3-32-B8-25
	32	35	■	■		8079221	DHAA-G-R3-32-B8-35
EHMB/HGPT-B	EHMB	HGPT-B			DHAA, HAPG		
	20	40	■	■	2	537184	HAPG-SD2-26
	20, 25, 32	50	■	■		564956	DHAA-G-Q5-32-B8-50
	25, 32	63	■	■		537188	HAPG-SD2-28

1) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Parallel grippers HGPT-B, heavy-duty


FESTO

Accessories

Gripper jaw blank BUB-HGPT

(scope of delivery: 2 pieces)

Material:
Aluminium

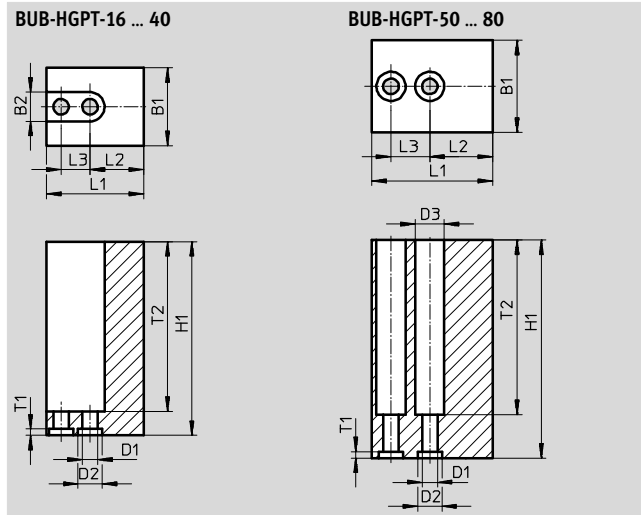

Dimensions and ordering data							
For size	B1	B2	D1	D2	D3	H1	L1
[mm]	±0.05	H13	Ø H13	Ø H8	Ø H13	±0.05	±0.05
16	16	6	3.2	5	–	40	21
20	19	6	3.2	5	–	45	27
25	24	8	4.3	7	–	60	31
35	28	10	5.3	9	–	70	39
40	34	11	6.4	9	–	75	49
50	40	–	6.4	9	11	100	61
63	50	–	10.3	12	17	120	79
80	58	–	12.4	15	20	140	88

For size	L2 ¹⁾	L3 ¹⁾	T1	T2	Weight per blank [g]	Part No.	Type
[mm]			+0.1				
16	10	8	1.3	35	29	560244	BUB-HGPT-16-B
20	11.75	12	1.3	36	53	560245	BUB-HGPT-20-B
25	13.25	13	1.6	51	98	560246	BUB-HGPT-25-B
35	17.5	16	2.1	61	161	560247	BUB-HGPT-35-B
40	22.5	20	2.1	66.5	280	560248	BUB-HGPT-40-B
50	29	24	2.1	91	622	560249	BUB-HGPT-50-B
63	37.5	32	2.6	110	1213	560250	BUB-HGPT-63-B
80	36	40	3.1	125	1738	560251	BUB-HGPT-80-B

1) Tolerance for centring hole ±0.02 mm
Tolerance for thread ±0.1 mm

Parallel grippers HGPT-B, heavy-duty

Accessories

FESTO

Ordering data						
	For size [mm]	Description	Weight [g]	Part No.	Type	PU ¹⁾
Centring sleeve ZBH				Technical data → Internet: zbh		
	16, 20	For centring gripper jaw blanks/gripper fingers on the gripper jaws	1	189652	ZBH-5	10
	25		1	186717	ZBH-7	
	35, 40, 50		1	150927	ZBH-9	
	63		1	189653	ZBH-12	
	80		3	191409	ZBH-15	
	20, 25	For lateral centring of gripper fingers on the gripper jaws	1	189652	ZBH-5	
	35, 40, 50, 63		1	186717	ZBH-7	
	80		1	150927	ZBH-9	
	16, 20	For centring the gripper during mounting	1	189652	ZBH-5	
	25, 35		1	186717	ZBH-7	
	40		1	150927	ZBH-9	
	50, 63, 80		1	189653	ZBH-12	
Connecting sleeve ZBV				Technical data → Internet: zbv		
	–	For compensating different centring diameters	1	571033	ZBV-6-5	1
			1	571034	ZBV-8-7	
			1	560253	ZBV-9-8	
			2	571035	ZBV-12-10	
			2	560255	ZBV-14-12	
Blanking plug B				Technical data → Internet: blanking plug		
	16, 20	For sealing the supply ports	1	30979	B-M3-S9	10
	25, 35, 40		1	174308	B-M5-B	
	50, 63		5	3568	B-1/8	
	80		15	3569	B-1/4	

1) Packaging unit

Parallel grippers HGPT-B, heavy-duty

Accessories

FESTO

Proximity sensors for size 16 ... 35

Ordering data – Proximity sensors for C-slot, magneto-resistive					Technical data → Internet: smt	
	Type of mounting	Electrical connection, connection direction	Switching output	Cable length [m]	Part No.	Type
N/O contact						
	Insertable in the slot lengthwise	Cable, 3-wire, lateral	PNP	2.5	547862	SMT-10G-PS-24V-E-2,5Q-OE
		Plug M8x1, 3-pin, lateral		0.3	547863	SMT-10G-PS-24V-E-0,3Q-M8D
		Cable, 3-wire, lateral	NPN	2.5	8065030	SMT-10G-NS-24V-E-2,5Q-OE
		Plug M8x1, 3-pin, lateral		0.3	8065029	SMT-10G-NS-24V-E-0,3Q-M8D

Proximity sensors for size 40 ... 80

Ordering data – Proximity sensors for T-slot, magneto-resistive					Technical data → Internet: smt	
	Type of mounting	Electrical connection, connection direction	Switching output	Cable length [m]	Part No.	Type
N/O contact						
	Insertable in the slot lengthwise	Cable, 3-wire, lateral	PNP	2.5	547859	SMT-8G-PS-24V-E-2,5Q-OE
		Plug M8x1, 3-pin, lateral		0.3	547860	SMT-8G-PS-24V-E-0,3Q-M8D
		Cable, 3-wire, lateral	NPN	2.5	8065028	SMT-8G-NS-24V-E-2,5Q-OE
		Plug M8x1, 3-pin, lateral		0.3	8065027	SMT-8G-NS-24V-E-0,3Q-M8D

Ordering data – Connecting cables

				Technical data → Internet: nebu	
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part No.	Type
	Straight socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541333	NEBU-M8G3-K-2.5-LE3
			5	541334	NEBU-M8G3-K-5-LE3
	Angled socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541338	NEBU-M8W3-K-2.5-LE3
			5	541341	NEBU-M8W3-K-5-LE3

Position transmitter

Mode of operation:

The position transmitter continuously senses the position of the piston. It has an analogue output with an output signal in proportion to the piston position.

Measuring range:


Measurement is possible across the entire stroke with the sizes 40 and 50. A stroke of 13 mm (with the high-force variant 6.5 mm) can be measured with the sizes 63 and 80.

Two position transmitters are required for sensing longer strokes.

Projection:

The position transmitter projects past the housing with the sizes 40 and 50.

Ordering data – Position transmitters for T-slot

Ordering data – Position transmitters for T-slot								Technical data → Internet: position transmitter	
	For size	Position measuring range	Analogue output		Type of mounting	Electrical connection	Cable length [m]	Part No.	Type
			[V]	[mA]					
	40 ... 80	0 ... 40	0 ... 10	–	Insertable in slot from above	Plug M8x1, 4-pin, in-line	0.3	553744	SMAT-8M-U-E-0,3-M8D

Parallel grippers HGPT-B, heavy-duty


Accessories



FESTO

Position transmitter

The position transmitter continuously senses the position of the piston.

It has an analogue output with an output signal in proportion to the piston position.

Ordering data – Position transmitter for T-slot							Technical data → Internet: position transmitter	
	For size	Position measuring range	Analogue output	Type of mounting	Electrical connection	Cable length [m]	Part No.	Type
			[mA]					
	63, 80	0 ... 50	4 ... 20	Insertable in slot from above	Plug M8x1, 4-pin, in-line	0.3	1531265	SDAT-MHS-M50-1L-SA-E-Q3-M8

Ordering data – Connecting cables					Technical data → Internet: nebu	
	Electrical connection, left		Electrical connection, right		Cable length [m]	Part No. Type
	Straight socket, M8x1, 4-pin		Cable, open end, 4-wire		2.5	541342 NEBU-M8G4-K-2.5-LE4
					5	541343 NEBU-M8G4-K-5-LE4
	Angled socket, M8x1, 4-pin		Cable, open end, 4-wire		2.5	541344 NEBU-M8W4-K-2.5-LE4
					5	541345 NEBU-M8W4-K-5-LE4

Festo North America



**1 Festo Canada
Headquarters**
Festo Inc.
5300 Explorer Drive
Mississauga, ON
L4W 5G4

2 Montréal
5600, Trans-Canada
Pointe-Claire, QC
H9R 1B6

3 Québec City
2930, rue Watt#117
Québec, QC
G1X 4G3



**4 Festo United States
Headquarters**
Festo Corporation
395 Moreland Road
Hauppauge, NY
11788

5 Appleton
North 922 Tower View Drive, Suite N
Greenville, WI
54942

7 Detroit
1441 West Long Lake Road
Troy, MI
48098

6 Chicago
85 W Algonquin - Suite 340
Arlington Heights, IL
60005

8 Silicon Valley
4935 Southfront Road, Suite F
Livermore, CA
94550

Festo Regional Contact Center

Canadian Customers

Commercial Support:

Tel: 1 877 GO FESTO (1 877 463 3786)

Fax: 1 877 FX FESTO (1 877 393 3786)

Email: festo.canada@ca.festo.com

Technical Support:

Tel: 1 866 GO FESTO (1 866 463 3786)

Fax: 1 877 FX FESTO (1 877 393 3786)

Email: technical.support@ca.festo.com

USA Customers

Commercial Support:

Tel: 1 800 99 FESTO (1 800 993 3786)

Fax: 1 800 96 FESTO (1 800 963 3786)

Email: customer.service@us.festo.com

Technical Support:

Tel: 1 866 GO FESTO (1 866 463 3786)

Fax: 1 800 96 FESTO (1 800 963 3786)

Email: product.support@us.festo.com

Subject to change

Internet: www.festo.com/us