

Mounting kits SAMH-S

FESTO



Mounting kits SAMH-S

Key features and type codes

FESTO

Function


Tamper-proof mounting of proximity sensors of the type SME-8M or SMT-8M-A. These mounting kits fulfil the applicable requirements of

EN ISO 13849-2 for mechanical systems: tamper-proof, captive components, positive-locking. The mounted cover prevents access to the clamping


screws of the terminal block and proximity sensor. This prevents the proximity sensor being disassembled or moved. The cover cannot be removed

without destroying it. This enables any attempt to tamper with the proximity sensor to be identified.

Mounting



- Screw terminal block firmly in place
- Fit cover on the sensor cable



- Push the cover forward as far as the proximity sensor and engage

Possible application

The mounting kit has been tested with the proximity sensors SMT-8M-A and SME-8M (apart from SME-8M-DO) within the framework of qualification

of the drives listed in the following table. The drive extends the overall length of the proximity sensor. To guarantee its reliable operation, the

specified minimum strokes must be taken into consideration with the drives. Compatibility with drives not

listed here must be examined where necessary.

Drive	Diameter in mm	Minimum stroke in mm	Restrictions
ADN/AEN	12	16	–
ADN/AEN	16	17	–
ADN/AEN	20	15	–
ADN/AEN	25	15	–
ADN/AEN	32	12	–
ADN/AEN	40	12	–
ADN/AEN	50	12	–
ADN/AEN	63	10	–
ADN/AEN	80	7	–
ADN/AEN	100	1	–
ADN/AEN	125	0	–
DNC	32	12	–
DNC	40	10	–
DNC	50	11	–
DNC	63	10	–
DNC	80	6	–
DNC	100	3	–
DNC	125	0	–
DNCE	32	23	SMx-8M ¹⁾
DNCE	40	22	SMx-8M ¹⁾
DNCE	63	17	–
DGC-KF	18	1	–
DGC-GF	32	0	–
DGC-GF	40	0	–
DGC-GF	50	0	–
DGC-KF	50	0	–
DGC-KF	63	0	–
DGC-GF	63	0	–

1) SME-8M, SMT-8M-A-PNS/PSO: Sensing of the end position at the bearing cap not possible.

Mounting kits SAMH-S

Key features and type codes



Drive	Diameter in mm	Minimum stroke in mm	Restrictions
STA- ... -P-A-R	20	15	–
STA- ... -P-A-R	32	11	–
STA- ... -P-A-R	50	11	–
DSBC/DNCB	32	15	–
DSBC/DNCB	40	14	–
DSBC/DNCB	50	14	–
DSBC/DNCB	63	14	–
DSBC/DNCB	80	13	–
DSBC/DNCB	100	13	–
STAF	32	17	–
STAF	50	17	–
STAF	80	14	–
DFST	50	15	–
DFST	63	7	–
DFST	80	0	–
DFSP	16	14	–
DFSP	20	16	–
DFSP	32	12	–
DFSP	40	12	–
DFSP	50	12	–

Type codes

SAMH-S-N8		–		–			
						Function	
						SAMH-S-N8	Mounting kit
						Length	
						L	Long for SME-8M-DS/ZS, SMT-8M-A-PNS/PSO
S	Short for SMT-8M-A-PS/NS/ZS/PO						
						Variant	
						MK	Mounting kit
SC	Slot cover						

Mounting kits SAMH-S

Technical data

FESTO

-  - Temperature range
-40 ... 85 °C



Technical data – Mounting kit		
Type	SAMH-S-N8-S-MK	SAMH-S-N8-L-MK
Design	For T-slot	
Type of mounting	Engaging	
	Insertable in the slot from above, secured with screw	
Max. tightening torque [Nm]	0.6	
Product weight [g]	1.88	1.91
Information on materials	High-alloy steel	
Note on materials	Free of copper and PTFE	
	RoHS-compliant	

Operating and environmental conditions		
Ambient temperature [°C]	-40 ... 85 °C	
Corrosion resistance class CRC ¹⁾	3	

- 1) Corrosion resistance class CRC 3 to Festo standard FN 940070
High corrosion stress. Outdoor exposure under moderate corrosive conditions. External visible parts with primarily functional requirements for the surface and which are in direct contact with a normal industrial environment.

Technical data – Cover		
Type	SAMH-S-N8-S-SC	SAMH-S-N8-L-SC
Design	For T-slot	
Type of mounting	Engaging	
	Insertable in the slot from above	
Product weight [g]	0.36	0.39
Information on materials	PA	
Note on materials	Free of copper and PTFE	
	RoHS-compliant	

Operating and environmental conditions		
Ambient temperature [°C]	-40 ... 85 °C	
Corrosion resistance class CRC ¹⁾	3	

- 1) Corrosion resistance class CRC 3 to Festo standard FN 940070
High corrosion stress. Outdoor exposure under moderate corrosive conditions. External visible parts with primarily functional requirements for the surface and which are in direct contact with a normal industrial environment.


Mounting kits SAMH-S

Technical data

FESTO

Dimensions

Download CAD data → www.festo.com

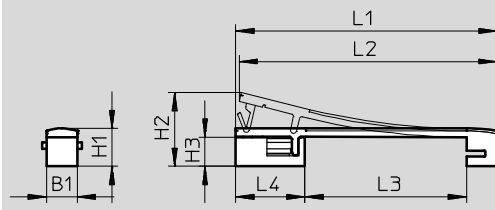


Type	B1	H1	H2	H3	L1	L2	L3	L4
SAMH-S-N8-S-MK	5.05	6.2	12.1	4.8	42.9	42	26.5	11.4
SAMH-S-N8-L-MK			14.1		48.4	47	32	

Ordering data

	Description	Part No.	Type	PU ¹⁾
Mounting kit, terminal block with cover	Short (for SMT-8M-A-PS/NS/ZS/PO)	575815	SAMH-S-N8-S-MK	1
	Long (for SME-8M-DS/ZS, SMT-8M-A-PNS/PSO)	575816	SAMH-S-N8-L-MK	1
Cover	Short	575817	SAMH-S-N8-S-SC	10
	Long	575818	SAMH-S-N8-L-SC	10

1) Packaging unit

Festo North America

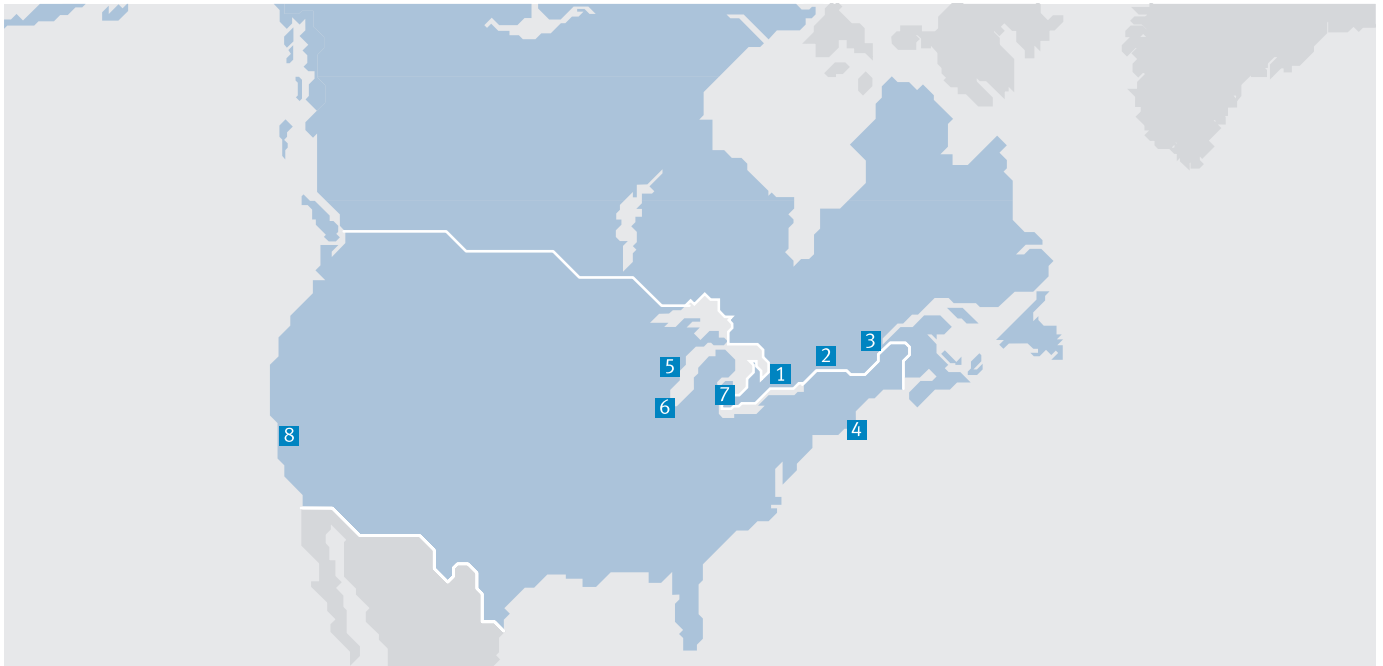

**1 Festo Canada
Headquarters**
Festo Inc.
5300 Explorer Drive
Mississauga, ON
L4W 5G4

2 Montréal
5600, Trans-Canada
Pointe-Claire, QC
H9R 1B6

3 Québec City
2930, rue Watt#117
Québec, QC
G1X 4G3



**4 Festo United States
Headquarters**
Festo Corporation
395 Moreland Road
Hauppauge, NY
11788

5 Appleton
North 922 Tower View Drive, Suite N
Greenville, WI
54942

7 Detroit
1441 West Long Lake Road
Troy, MI
48098

6 Chicago
85 W Algonquin - Suite 340
Arlington Heights, IL
60005

8 Silicon Valley
4935 Southfront Road, Suite F
Livermore, CA
94550

Festo Regional Contact Center

Canadian Customers

Commercial Support:
Tel: 1 877 GO FESTO (1 877 463 3786)
Fax: 1 877 FX FESTO (1 877 393 3786)
Email: festo.canada@ca.festo.com

Technical Support:
Tel: 1 866 GO FESTO (1 866 463 3786)
Fax: 1 877 FX FESTO (1 877 393 3786)
Email: technical.support@ca.festo.com

USA Customers

Commercial Support:
Tel: 1 800 99 FESTO (1 800 993 3786)
Fax: 1 800 96 FESTO (1 800 963 3786)
Email: customer.service@us.festo.com

Technical Support:
Tel: 1 866 GO FESTO (1 866 463 3786)
Fax: 1 800 96 FESTO (1 800 963 3786)
Email: product.support@us.festo.com

Subject to change

Internet: www.festo.com/us