

Proportional pressure regulators VPPX


FESTO



Proportional pressure regulators VPPX

Features

FESTO

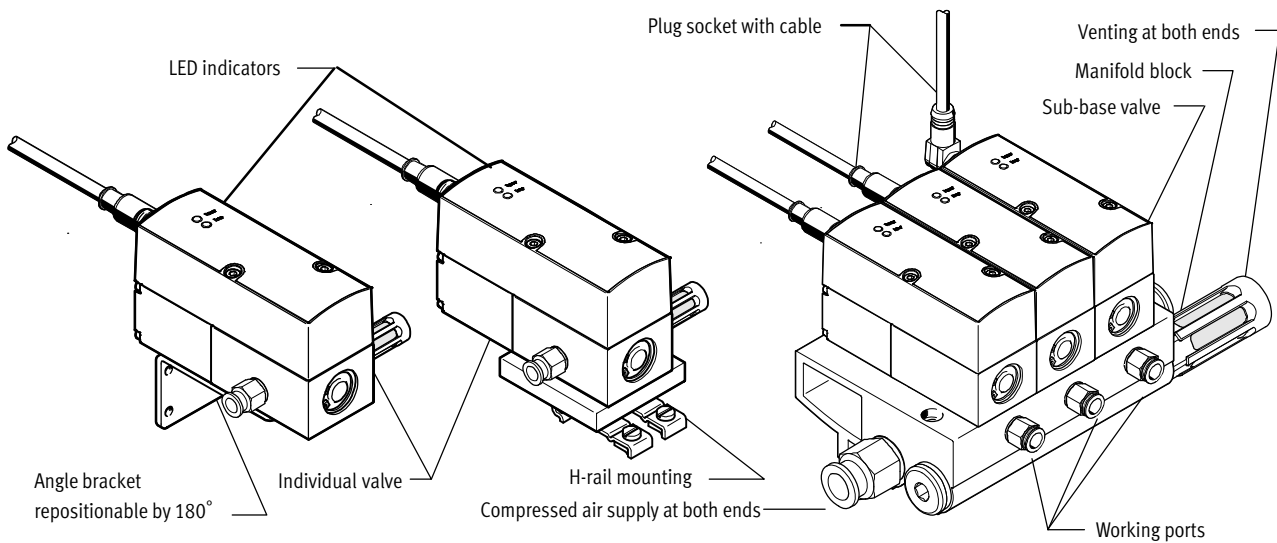

Innovative

- Multi-sensor control (cascade control)
- Control characteristic adjustable via FCT
- Temperature compensated
- High dynamic response
- High repetition accuracy

Versatile

- Individual valves (in-line valve)
- Sub-base valves (manifold/flanged valve)
- Actual value input for external sensors
- Limit value freely adjustable
- Possible to control many physical variables
- Setpoint value and actual value individually adjustable via FCT

Reliable

- Integrated pressure sensor with separate output
- Wire break monitoring
- Pressure is maintained if the controller fails

Easy to mount

- Manifold block (connection block)
- H-rail mounting
- Individually via mounting bracket
- QS fittings

Proportional pressure regulators VPPX

Key features

FESTO

Overview of VPPX


Parameterisation

Parameterisation of the proportional valve VPPX can be carried out using the Festo Configuration Tool.

The Festo Configuration Tool can be downloaded from the Support Portal.
→ www.festo.com

The connection between the PC and the proportional valve VPPX takes place via a programming cable (VAVE) and the adapter (NEFC-M12G5-03-U1G5).

A standard USB connecting cable is used to connect the adapter to the PC.

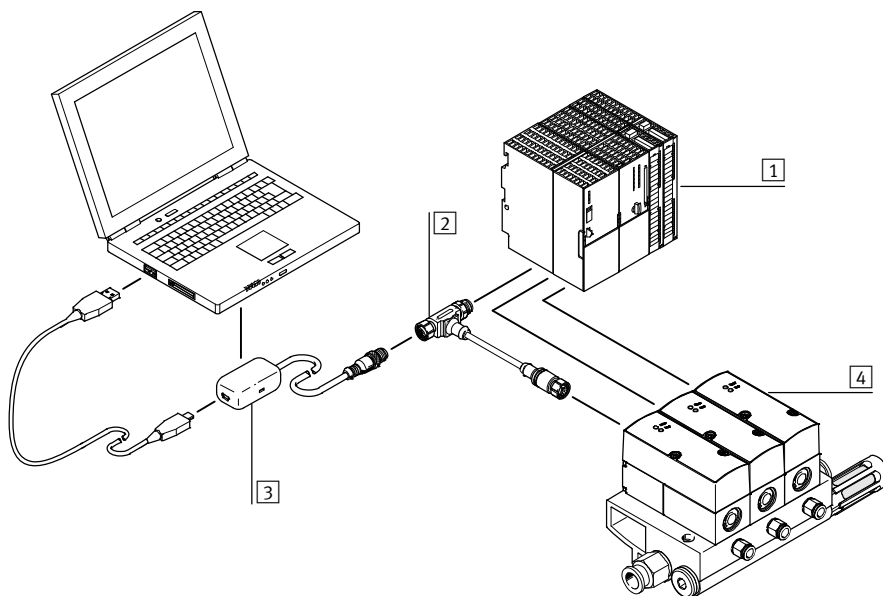


- 1 PLC
- 2 Programming cable VAVE
- 3 Adapter NEFC
- 4 Valve manifold VPPX

Sensor connection

The DUO cable makes it possible to easily connect an external sensor to the VPPX.

To ensure a secure connection, the sensor and valve signals are pre-assigned.

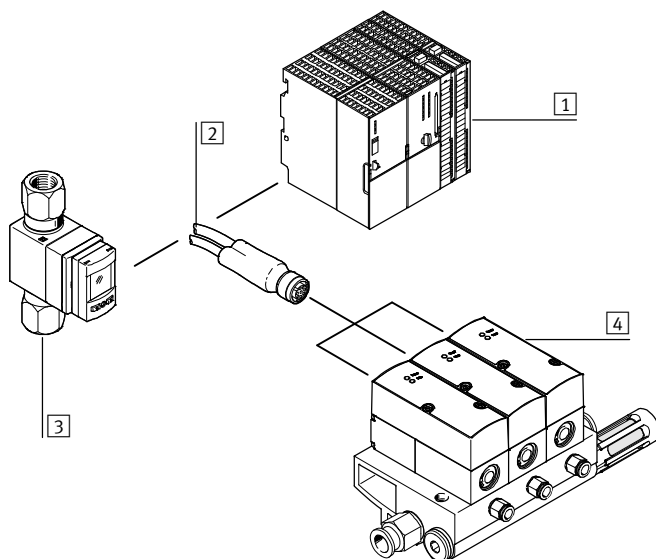


- 1 PLC
- 2 DUO cable NEDU
- 3 Sensor SFAB
- 4 Valve manifold VPPX

Proportional pressure regulators VPPX

Key features

FESTO

Layout of a control circuit

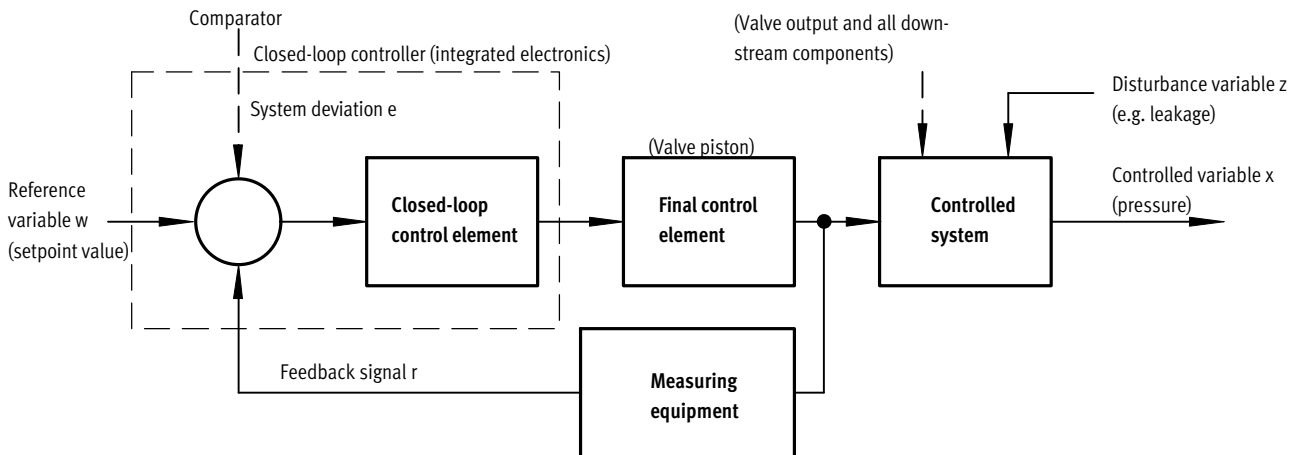

Configuration

The figure shows a closed-loop control circuit. The reference variable w (setpoint value, e.g. 5 volts or 8 mA) initially acts on a comparator. The measuring equipment sends the controlled variable x value (actual value, e.g. 3 bar) to the comparator as a feedback signal r . The closed-loop control element detects the system


deviation e and actuates the final control element. The output of the final control element acts on the controlled system. The closed-loop control element thus attempts to compensate for the difference between the reference variable w and the controlled variable x by using the final control element.

Method of operation

This process runs continuously so changes in the reference variable are always detected. However, a system deviation will also occur if the reference variable is constant but the controlled variable changes. This happens when the flow through the valve changes in response to a switching operation, a cylinder movement or a

change in load. The disturbance variable z will also cause a system deviation. An example of this is when the pressure drops in the air supply. The disturbance variable z acts on the controlled variable x unintentionally. In all cases, the regulator attempts to readjust the controlled variable x to the reference variable w .

Multi-sensor control (cascade control) of the VPPX

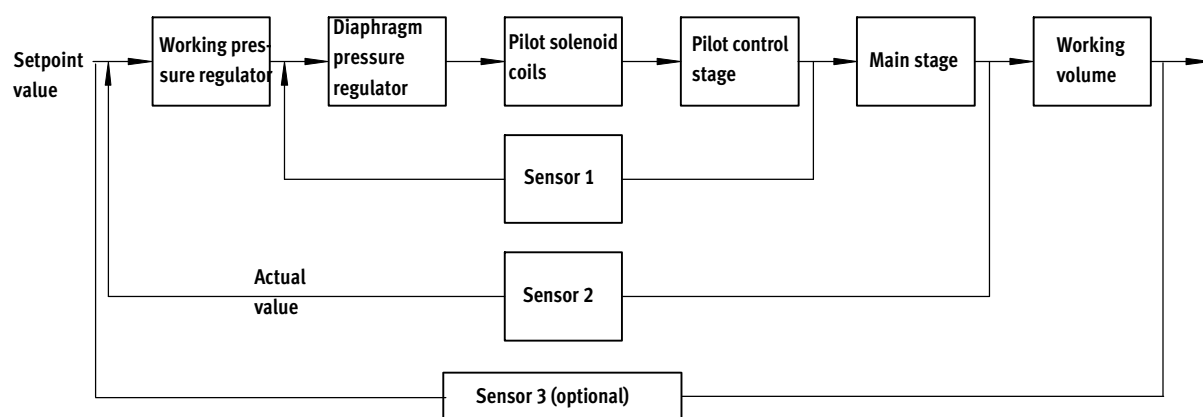

Cascade control

Unlike conventional direct-acting regulators, with multi-sensor control several control circuits are nested inside each other. The overall controlled

system is divided into smaller sub-sections that are easier to control for the specific task.

Control precision

Multi-sensor control significantly improves control precision and dynamic response in comparison with single-acting regulators.


Proportional pressure regulators VPPX

Key features

FESTO


Terms related to the proportional pressure regulator

Hysteresis




There is always a linear relationship within a certain tolerance between the setpoint value entered and the pressure output. Nevertheless, it makes a difference whether the setpoint value is entered as rising or falling. The difference between the maximum deviations is referred to as hysteresis.

Linearity error




A perfectly linear progression of the control characteristic of the output pressure is theoretical. The maximum percentage deviation from this theoretical control characteristic is referred to as the linearity error. The percentage value refers to the maximum output pressure (full scale).

Response sensitivity




The response sensitivity of the device determines how sensitively one can change, i.e. adjust, a pressure. The smallest setpoint value difference that results in a change in the output pressure is referred to as the response sensitivity. In this case, 0.01 bar.

Repetition accuracy (reproducibility)




The repetition accuracy is the margin within which the fluid output variables are scattered when the same electrical input signal coming from the same direction is repeatedly adjusted. The repetition accuracy is expressed as a percentage of the maximum fluid output signal.

Zero offset




If, for example, a VPPX cannot be vented for safety reasons, the minimum pressure can be increased from the zero point. The smallest setpoint value is then assigned an output pressure of 5 bar, for example, and the largest setpoint value an output pressure of 10 bar. Zero point suppression is automatically switched off if the zero offset is used.

Pressure range adaptation



In the delivery status, 100% setpoint value corresponds to 100% of the fluid output signal. Pressure range adaptation or adjustment enables the fluid output variable to be matched to the setpoint value.

Zero point suppression




In practice there may be residual voltage or residual current at the setpoint input of the VPPX via the setpoint generator. Zero point suppression is used so that the valve is reliably vented at a setpoint value of zero.

Proportional pressure regulators VPPX

Product range overview

FESTO


Function	Circuit symbol	Description	Pneumatic connection 1, 2, 3	Nominal width for pressurisation/exhaust [mm]	→ Page/Internet
Pressure regulators	LED operator unit (standard) 	• Piloted diaphragm valve • Pressure regulation range: 0.1 ... 10 bar • Setpoint value input: 0 ... 10 V DC, 0 ... 20 mA, 4 ... 20 mA	G1/8	6/4.5	11
			Sub-Base	6/4.5	
				8/7	
			G1/4	8/7	
			G1/2	12/12	

Proportional pressure regulators VPPX

Peripherals overview

FESTO

Individual valve VPPX-6L ..., VPPX-8L ...

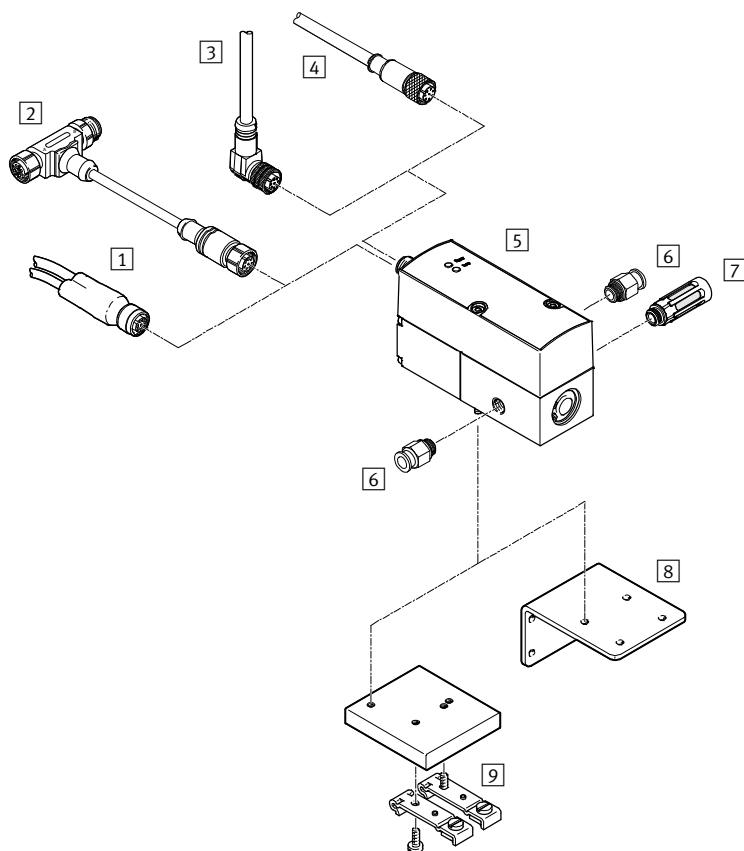


Accessories		
	Description	→ Page/Internet
1	DUO cable	For connecting one sensor with the VPPX
2	Programming cable VAVE	For adapter NEFC
3	Angled plug socket with cable NEBU-M12W8-...	—
4	Straight plug socket with cable SIM-M12-8GD-...	—
5	Proportional pressure regulator VPPX	Operator unit with LED
6	Push-in fitting QS	For connecting compressed air tubing with standard outside diameter
7	Silencers	For fitting in exhaust ports
8	Angle bracket VAME-P1-A	For mounting the valve
9	H-rail mounting VAME-P1-T	For mounting on an H-rail

Proportional pressure regulators VPPX

Peripherals overview

FESTO

Individual valve VPPX-12L ...

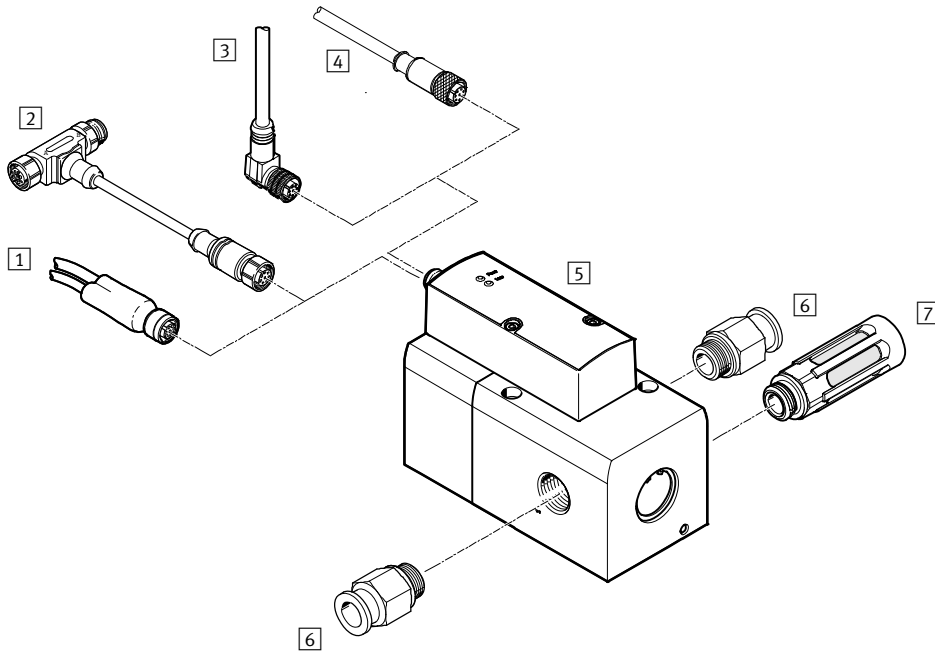


Accessories		
	Description	→ Page/Internet
1	DUO cable	For connecting one sensor with the VPPX
2	Programming cable VAVE	For adapter NEFC
3	Angled plug socket with cable NEBU-M12W8-...	–
4	Straight plug socket with cable SIM-M12-8GD-...	–
5	Proportional pressure regulator VPPX	Operator unit with LED
6	Push-in fitting QS	For connecting compressed air tubing with standard outside diameter
7	Silencers	For fitting in exhaust ports

Proportional pressure regulators VPPX

Peripherals overview

FESTO

Manifold assembly with VPPX-6F ..., VPPX-8F ...

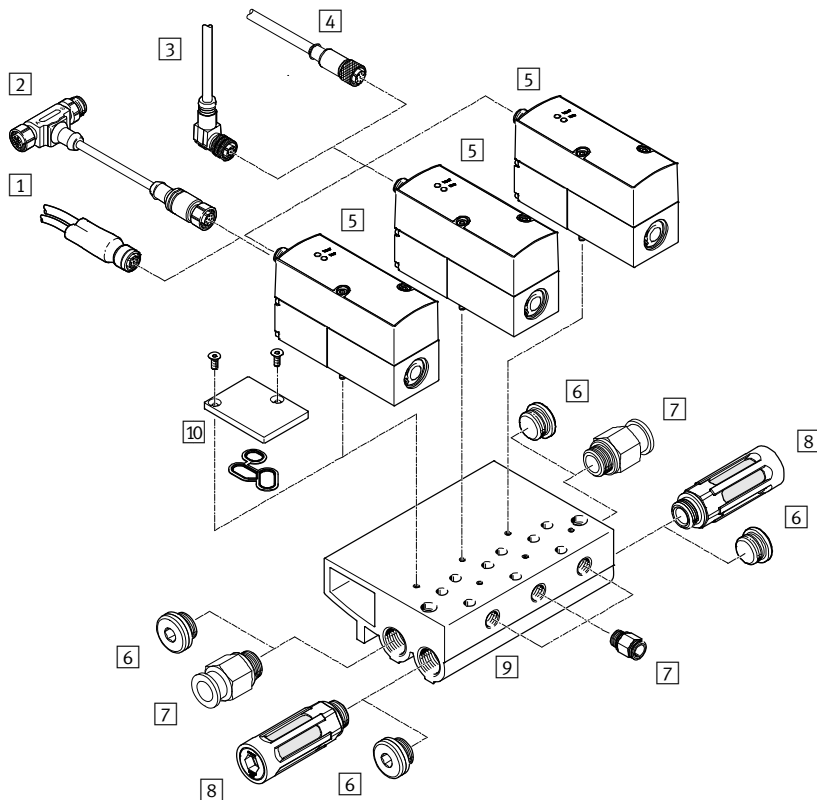

Accessories		
	Description	→ Page/Internet
1	DUO cable	For connecting one sensor with the VPPX
2	Programming cable VAVE	For adapter NEFC
3	Angled plug socket with cable NEBU-M12W8-...	–
4	Straight plug socket with cable SIM-M12-8GD-...	–
5	Proportional pressure regulator VPPX	Operator unit with LED
6	Blanking plug B	–
7	Push-in fitting QS	For connecting compressed air tubing with standard outside diameter
8	Silencers	For fitting in exhaust ports
9	Manifold block VABM	–
10	Blanking plate VABB-P1	For vacant position; seal and countersunk screws included in the scope of delivery

Proportional pressure regulators VPPX

Type codes

FESTO

VPPX – 6 L – L – 1 – G18 – 0L 10H – S1

Type	
VPPX	Proportional pressure regulator Modular

Nominal width	
6	6 mm
8	8 mm
12	12 mm

Design	
L	In-line valve
F	Flanged valve

Dynamic response class	
L	Low

Valve function	
1	3/2-way valve, normally closed

Pneumatic connection	
G18	G1/8 thread
G14	G1/4 thread
G12	G1/2 thread
F	Flange/sub-base

Lower pressure value of control range	
0L	0 bar

Upper pressure value of control range	
10H	10 bar

Overall accuracy	
S1	1%

Proportional pressure regulators VPPX

FESTO

Technical data

-  - Flow rate
1,400 ... 7,000 l/min

-  - Voltage
21.6 ... 26.4 V DC

-  - Pressure regulation range
0.02 ... 10 bar

Variants

- Analogue setpoint signal adjustable via FCT 0 ... 10 V, 0 ... 20 mA, 4 ... 20 mA
- External sensor input
- Actual value output adjustable via FCT 0 ... 10 V, 0 ... 20 mA, 4 ... 20 mA
- Programming interface



General technical data							
Port			G1/8	G1/4	G1/2	Sub-base	
Valve function			3-way proportional pressure regulator				
Design			Piloted diaphragm regulator				
Sealing principle			Soft				
Actuation type			Electric				
Type of control			Piloted				
Reset method			Mechanical spring				
Type of mounting			Via through-hole, via accessories				
Mounting position			Any				
Nominal width	Pressurisation	[mm]	6	8	12	6	8
	Exhaust	[mm]	4.5	7	12	4.5	7
Standard nominal flow rate		[l/min]	➔ Graphs				
Product weight		[g]	400	560	2,050	400	560

Electrical data					
Type			VPPX-6	VPPX-8	VPPX-12
Electrical connection			Plug, round design, 8-pin, M12		
Operating voltage range		[V DC]	24 ± 10% = 21.6 ... 26.4		
Residual ripple		[%]	10		
Duty cycle		[%]	100		
Max. electrical power consumption		[W]	7	7	12
Setpoint input signal	Voltage	[V DC]	0 ... 10		
	Current	[mA]	0 ... 20, 4 ... 20		
Protection against short circuit			For all electrical connections		
Protection against polarity reversal			For all electrical connections		
Protection class			IP65		

-  - Note
Output pressure remains unregulated if the power supply cable is interrupted.


Proportional pressure regulators VPPX

Technical data

FESTO


Flow rate q_n from 1 $\rightarrow$ 2 as a function of output pressure p_2

VPPX-6L/F...-OL10H-... (10 bar)

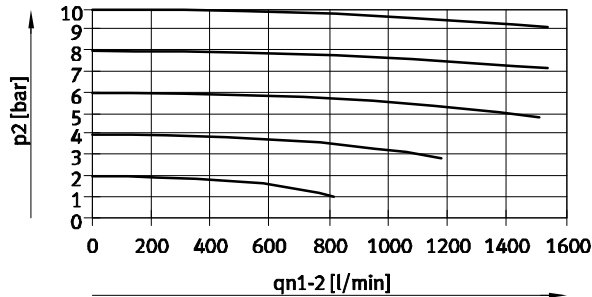


Flow rate q_n from 2 $\rightarrow$ 3 as a function of output pressure p_2

VPPX-6L/F...-OL10H-... (10 bar)

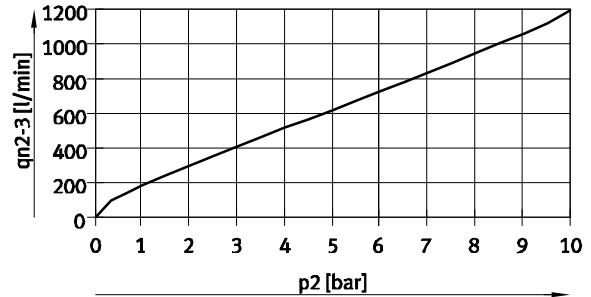

Flow rate q_n from 1 $\rightarrow$ 2 as a function of output pressure p_2

VPPX-8L...-OL10H-... (10 bar)

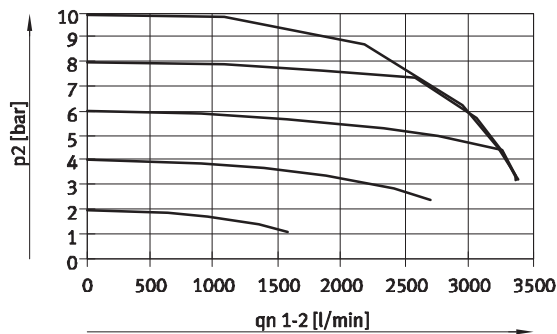


Flow rate q_n from 2 $\rightarrow$ 3 as a function of output pressure p_2

VPPX-8L...-OL10H-... (10 bar)



Flow rate q_n from 1 $\rightarrow$ 2 as a function of output pressure p_2

VPPX-8F...-OL10H-... (10 bar)

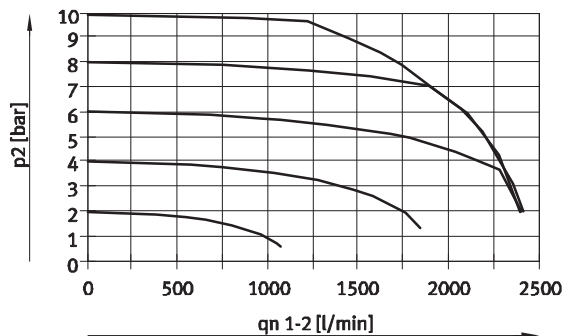


Flow rate q_n from 2 $\rightarrow$ 3 as a function of output pressure p_2

VPPX-8F...-OL10H-... (10 bar)




Flow rate q_n from 1 $\rightarrow$ 2 as a function of output pressure p_2

VPPX-12L...-OL10H-... (10 bar)

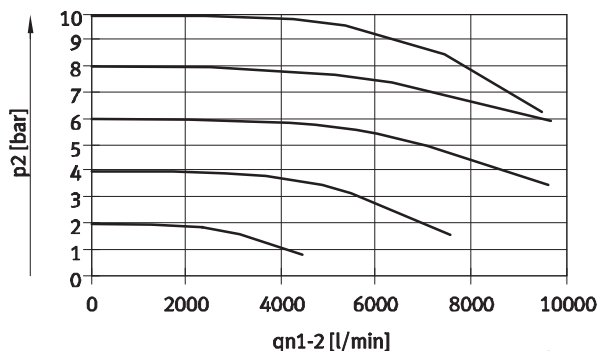

Flow rate q_n from 2 $\rightarrow$ 3 as a function of output pressure p_2

VPPX-12L...-OL10H-... (10 bar)

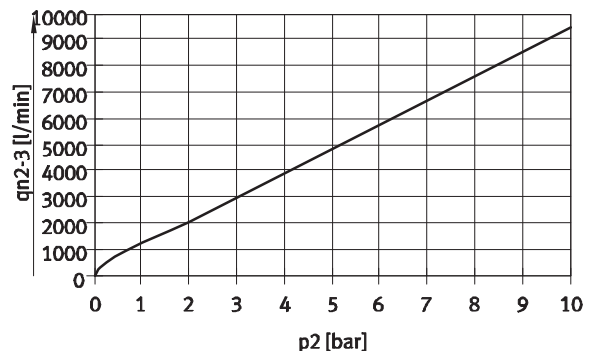

Proportional pressure regulators VPPX

FESTO

Technical data

Operating and environmental conditions		
Pressure regulation range	[bar]	0.1 ... 10
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4] Inert gases
Note on operating/pilot medium		Lubricated operation not possible
Supply pressure 1 ¹⁾	[bar]	0 ... 11
Pressure regulation range	[bar]	0.1 ... 10
Max. pressure hysteresis	[mbar]	50
FS (full scale) linearity error	[%]	± 0.5
FS (full scale) repetition accuracy	[%]	0.5
Temperature coefficient	[%/K]	0.04
Ambient temperature, operator unit LED (standard)	[°C]	0 ... 60
Ambient temperature, operator unit with LCD	[°C]	0 ... 50
Temperature of medium	[°C]	10 ... 50
Note on materials		RoHS-compliant
Corrosion resistance class	[CRC]	2 ²⁾
CE marking		To EU EMC Directive (see declaration of conformity) ³⁾
Certification		RCM trademark c UL us - Listed (OL)

1) Supply pressure 1 should always be 1 bar greater than the maximum regulated output pressure.

2) Corrosion resistance class 2 according to Festo standard 940 070


Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with the surrounding industrial environment or media such as coolants or lubricating agents.

3) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com/sp → User documentation.

If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

Materials

Sectional view VPPX-6 ..., VPPX-8 ...

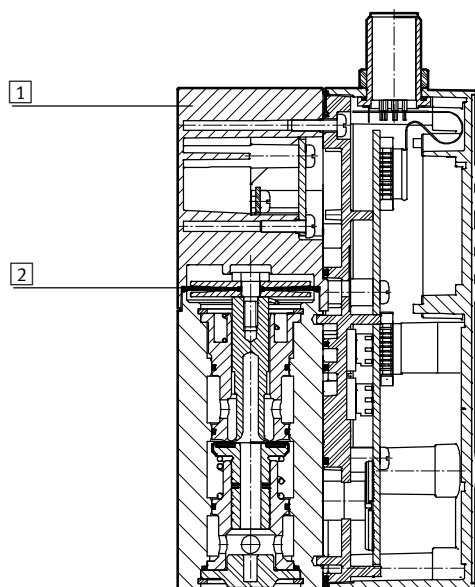

1	Housing	Wrought aluminium alloy
2	Diaphragm	NBR

Proportional pressure regulators VPPX


Technical data

FESTO

Dimensions

Download CAD data → www.festo.com


VPPX-6F

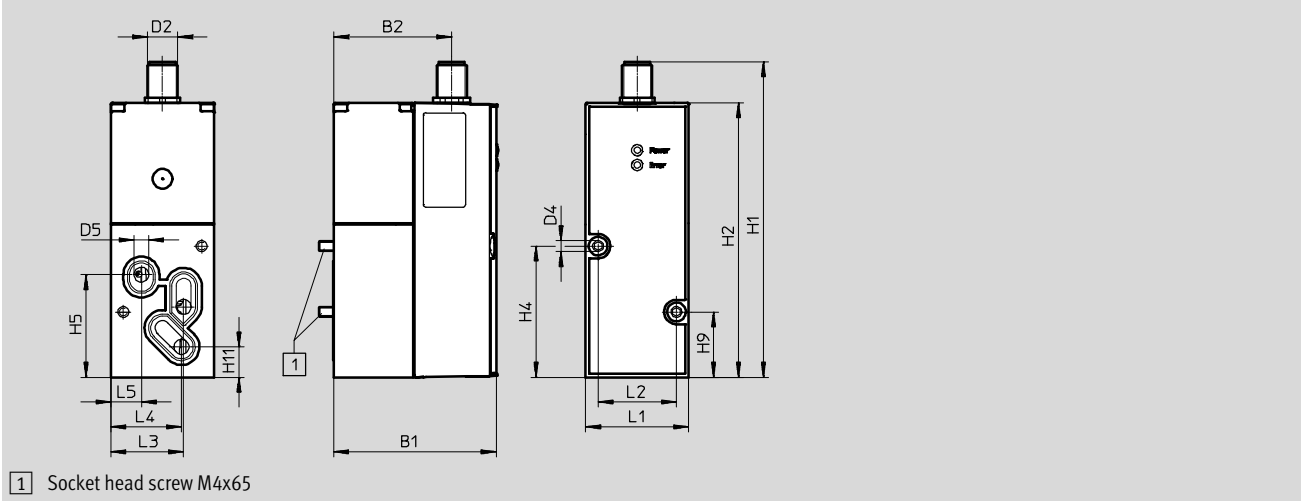

Type	B1	B2	D2	D4 Ø	D5 Ø	H1	H2	H4	H5	H8	H9	H11
VPPX-6F	65.4	47.5	M12	4.4	6	126.9	110.4	52.8	41.3	28.3	26.3	12.2


Type	L1	L2	L3	L4	L5
VPPX-6F	41.5	31.5	29.3	28.4	12.3

VPPX-6L

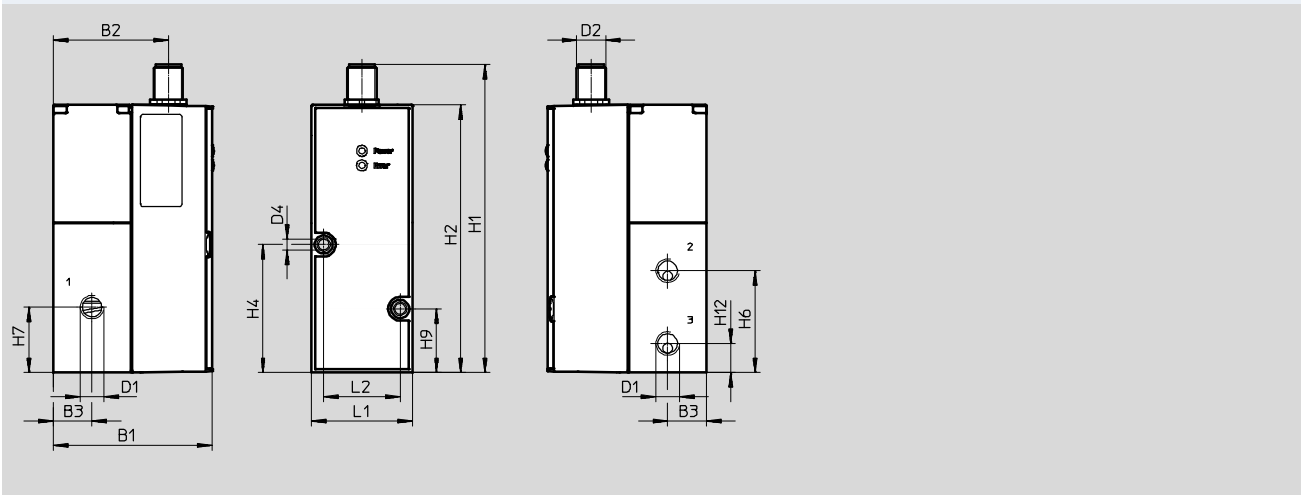

Type	B1	B2	B3	D1	D2	D4 Ø	H1	H2	H4	H6	H7	H9	H12	L1	L2
VPPX-6L	65.5	47.5	16	G1/8	M12	4.4	126.9	110.4	52.8	42	27	26.3	12	41.5	31.5

M12 – Pin allocation



- | | | |
|--------------------------|------------------------|----------------------------------|
| 1 Do not connect Tx_PC | 4 Analogue input W+ | 7 0 V DC or GND |
| 2 24 V DC supply voltage | 5 Do not connect Rx_PC | 8 Input for ext. sensor signal + |
| 3 Analogue input W- | 6 Analogue output X | |

Proportional pressure regulators VPPX


Technical data

FESTO

Dimensions

Download CAD data → www.festo.com

VPPX-8F

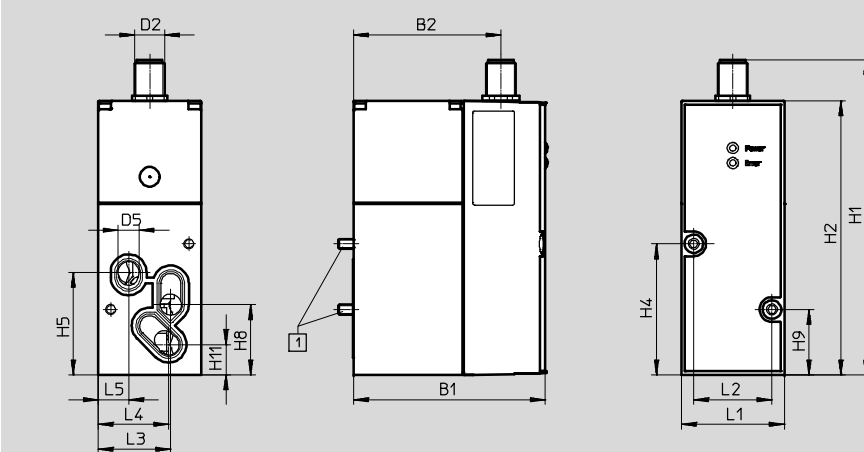


1 Socket head screw M4x77

Type	B1	B2	D2	D5 Ø	H1	H2	H4	H5	H8	H9	H11
VPPX-8F	77.4	59.5	M12	8.5	126.9	110.4	52.8	41.3	28.3	26.3	12.2

Type	L1	L2	L3	L4	L5
VPPX-8F	41.5	31.5	29.3	28.4	12.3

VPPX-8L

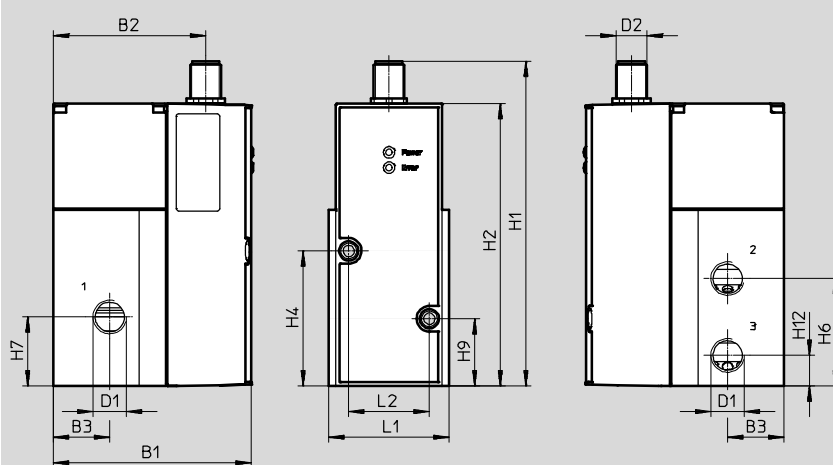

Type	B1	B2	B3	D1	D2	H1	H2	H4	H6	H7	H9	H12	L1	L2
VPPX-8L	77.4	59.5	22	G1/4	M12	126.9	110.4	52.8	42	27	26.3	12	47	31.5

Proportional pressure regulators VPPX


Technical data

FESTO

Dimensions




Download CAD data → www.festo.com

VPPX-12L

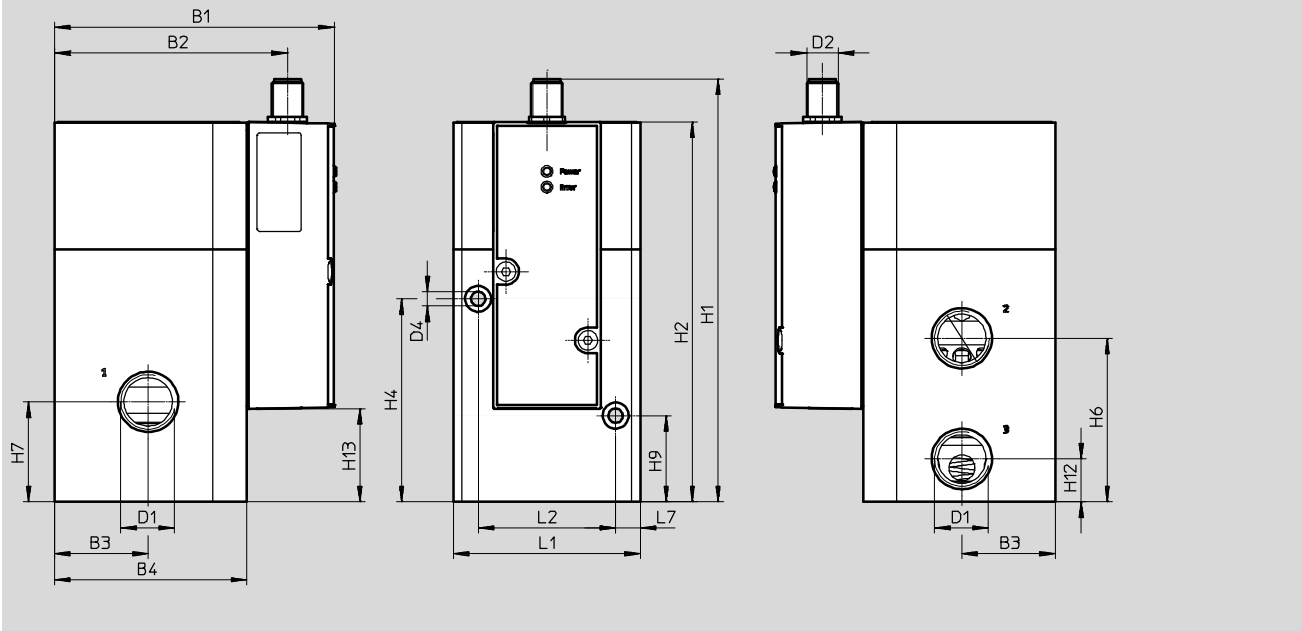

Type	B1	B2	B3	B4	D1	D2	H1	H2	H4	H6	H7	H9	H12	L1	L2	L7
VPPX-12L	107.3	89.4	36	74	G1/2	M12	162.8	146.3	78.2	63	38.5	33.2	16.5	72	53	9.5

Ordering data

Proportional pressure regulators VPPX	Pneumatic connection 1, 2, 3	Part No.	Type
Voltage type 0 ... 10 V			
	G1/8	570967	VPPX-6L-L-1-G18-0L10H
	G1/4	570969	VPPX-8L-L-1-G14-0L10H
	G1/2	2448444	VPPX-12L-L-1-G12-0L10H-S1
	Sub-base	570968	VPPX-6F-L-1-F-0L10H
		570970	VPPX-8F-L-1-F-0L10H


Proportional pressure regulators VPPX

Accessories

FESTO


Manifold block
VABM-P1

Material:
Wrought aluminium alloy

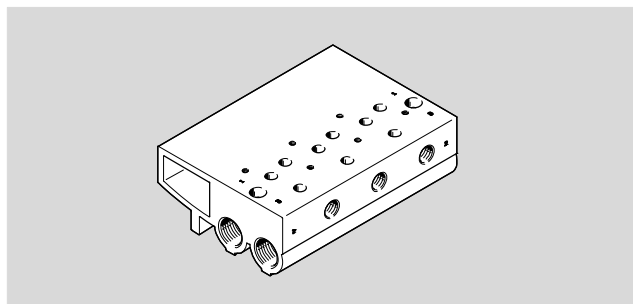

Dimensions

Download CAD data → www.festo.com

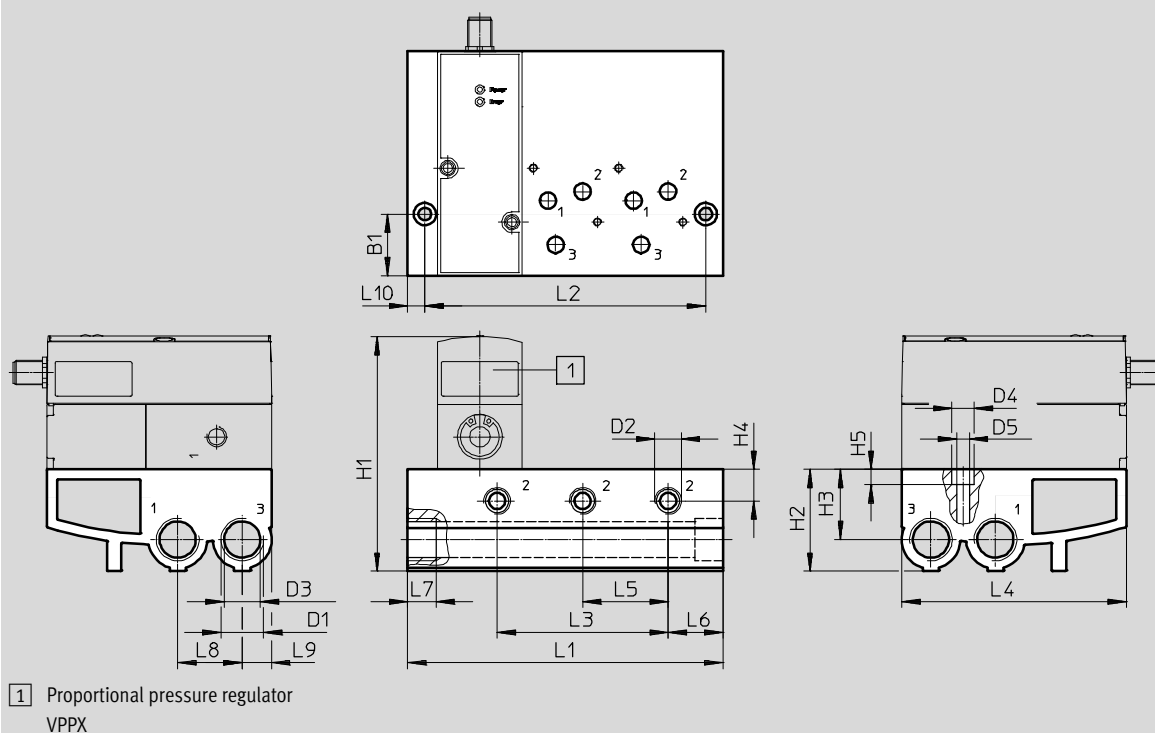

Dimensions and ordering data

Valve positions	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10
2	113	96	42	110.4	42	27	14	31.7	14.4	8.5
3	155	138	84	110.4	42	27	14	31.7	14.4	8.5
4	197	180	126	110.4	42	27	14	31.7	14.4	8.5

Dimensions and ordering data

Valve positions	B1	D1	D2	D3	D4	D5	H1	H2	H3	H4	H5	Part No.	Type
2	30.2	G1/2	G1/4	17.8	11	6.2	116	50	34.5	15.5	7.5	542252	VABM-P1-SF-G14-2-P3
3	30.2	G1/2	G1/4	17.8	11	6.2	116	50	34.5	15.5	7.5	542253	VABM-P1-SF-G14-3-P3
4	30.2	G1/2	G1/4	17.8	11	6.2	116	50	34.5	15.5	7.5	542254	VABM-P1-SF-G14-4-P3

-  - Note

Only flanged valves VPPX-6F- ... and VPPX-8F- ... may be used in combination with the manifold block VABM-P1-


Proportional pressure regulators VPPX

Accessories

FESTO


Blanking plate
VABB-P1

- Material:
- Wrought aluminium alloy
 - NBR
 - Steel

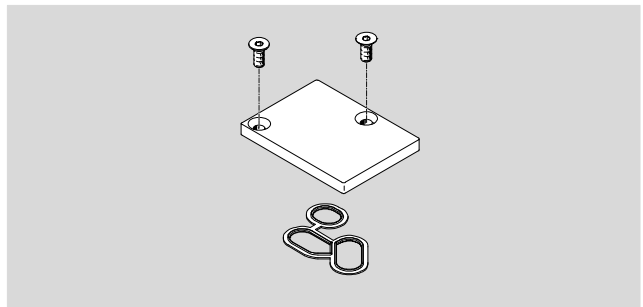

Dimensions

Download CAD data → www.festo.com

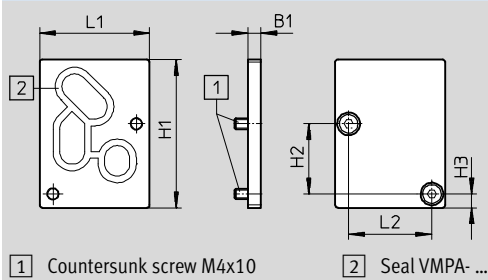

Dimensions and ordering data

B1	H1	H2	H3	L1	L2	Part No.	Type
5	56	26.5	5.2	41.5	31.5	558350	VABB-P1

Proportional pressure regulators VPPX


Accessories

FESTO

Angle bracket
VAME-P1-A


Material:

- Wrought aluminium alloy
- Steel

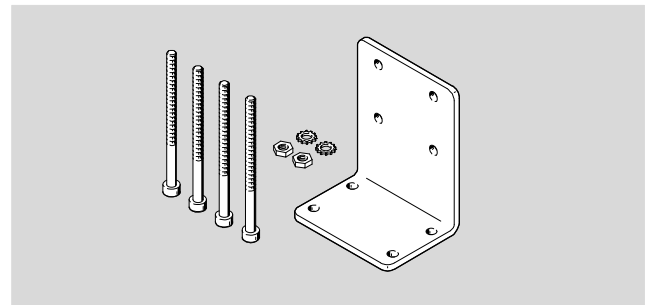

Dimensions

Download CAD data → www.festo.com

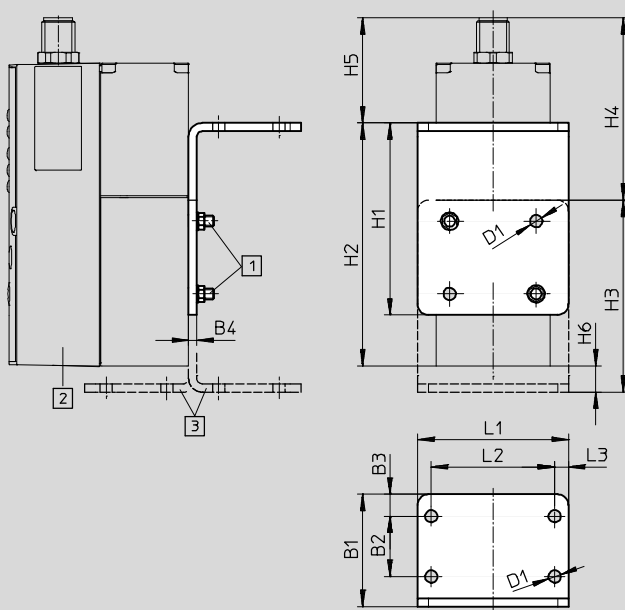

1 Socket head screw M4

2 Proportional pressure regulator VPPX

3 Bracket can be reversed if required

Dimensions and ordering data

B1	B2	B3	B4	D1	H1	H2	H3	H4	H5	H6	L1	L2	L3	Part No.	Type
41	22	8	3	4.5	70	88.6	70	66.4	38.3	9.5	55	45	5	542251	VAME-P1-A

-  - Note

Only in-line valves VPPX-6L- ... and VPPX-8L- ... may be used in combination with the angle bracket VAME-P1- A.


Proportional pressure regulators VPPX

Accessories

FESTO


H-rail mounting
VAME-P1-T

Material:
• Wrought aluminium alloy
• Steel

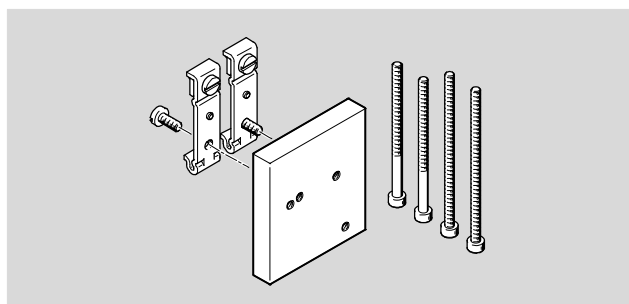

Dimensions

Download CAD data → www.festo.com

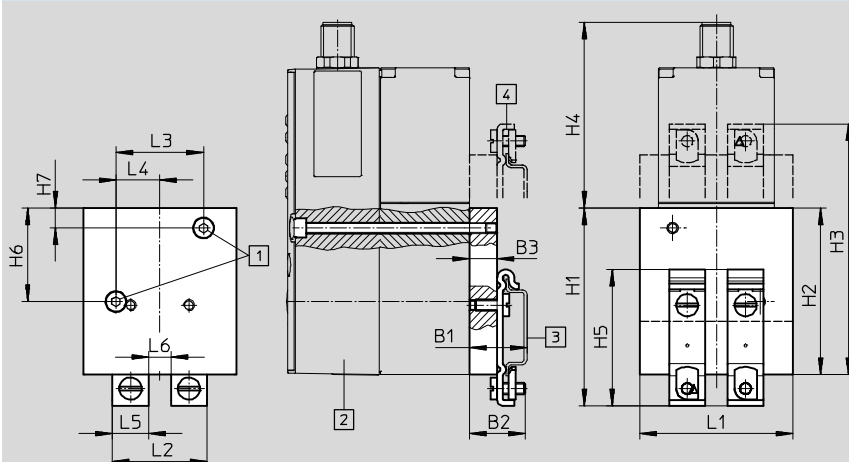

1 Socket head screw M4

2 Proportional pressure regulator
VPPX

3 H-rail NRH

4 H-rail mounting can be rotated
by 180° if required

Dimensions and ordering data

B1	B2	B3	H1	H2	H3	H4	H5	H6	H7	L1	L2	L3	L4	L5	L6	Part No.	Type
20.7	20	10	71.2	60	90.3	66.9	49.1	33.7	7.2	55	34	31.5	15.8	13	8	542255	VAME-P1-T

-  - Note

Only in-line valves VPPX-6L- ... and VPPX-8L- ... may be used in
combination with the H-rail VAME-P1- T.

Proportional pressure regulators VPPX

FESTO

Accessories

Programming cable VAVE


Material:

- Screw locking: Die-cast zinc, nickel plated
- Housing: TPE-U(PUR)
- Cable sheath: TPE-U(PUR)
- Seals: NBR
- Contacts: Gold-plated brass



Dimensions

Download CAD data → www.festo.com

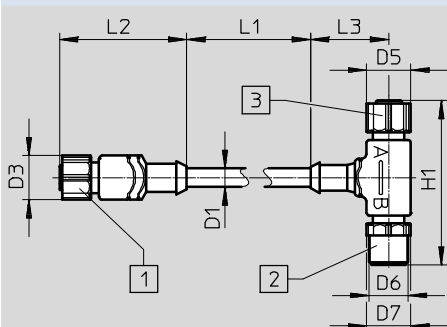

1 M12x1 socket, 8-pin

2 M12x1 plug, 8-pin

3 M12x1 socket, 4-pin

Dimensions and ordering data

D1 - Ø -	D3 - Ø -	D5 - Ø -	D6	D7 - Ø -	H1	L1	L2	L3	Part No.	Type
6.2	14.5	14.5	M12x1	14.5	54	150	41.7	11.1	570971	VAVE-P8-VPS

Ordering data

Connecting cable		Description	Part No.	Type
Connecting cable			Technical data → Internet: connecting cable	
	Straight socket, 8-pin, M12	2 m	525616	SIM-M12-8GD-2-PU
		5 m	525618	SIM-M12-8GD-5-PU
		10 m	570008	SIM-M12-8GD-10-PU
	Angled socket, 8-pin, M12	2 m	542256	NEBU-M12W8-K-2-N-LE8
		5 m	542257	NEBU-M12W8-K-5-N-LE8
		10 m	570007	NEBU-M12W8-K-10-N-LE8
Setpoint module			Technical data → Internet: mpz	
	Setpoint module for generating 6 + 1 analogue voltage signals		546224	MPZ-1-24DC-SGH-6-SW5
Adapter			Technical data → Internet: nefc	
	For connecting the interface on the VPPX valves/VPPX manifold to the PC. A standard USB cable with mini USB connector is also required		547432	NEFC-M12G5-0.3-U1G5

Proportional pressure regulators VPPX

Accessories


FESTO

DUO cable

NEDU-L1R2-V9-M12G8-E


Material:

- Screw locking: Nickel plated brass
- Seals: FPM
- Housing: TPE-U(PU)
- Cable sheath: TPE-U(PUR)
- Insulating sheath: PVC
- Contacts: Gold-plated brass

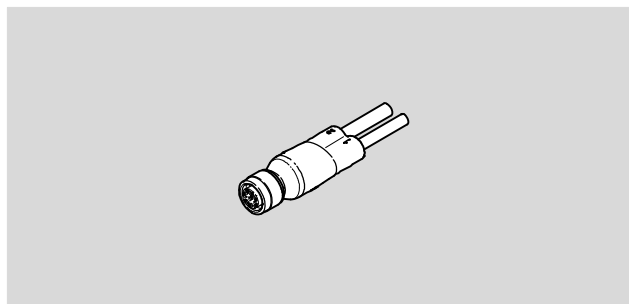

Dimensions

Download CAD data → www.festo.com

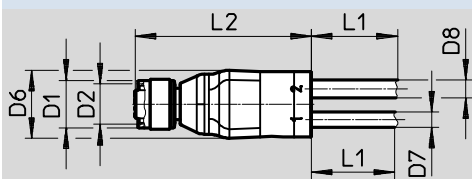

Type	D1 -Ø-	D2	D6 -Ø-	D7 -Ø-	D8 -Ø-	L1	L2
NEDU-L1R2-V9	14.5	M12x1	20	4.5	54	5000 + 200	51.6

Ordering data

Electrical connection	Part No.	Type
Socket M12, 8-pin	2903567	NEDU-L1R2-V9-M12G8-E-LE5-5R1-LE3-5R2
• Open cable end, 3-core		
• Open cable end, 5-core		

Festo North America



**1 Festo Canada
Headquarters**
Festo Inc.
5300 Explorer Drive
Mississauga, ON
L4W 5G4

2 Montréal
5600, Trans-Canada
Pointe-Claire, QC
H9R 1B6

3 Québec City
2930, rue Watt#117
Québec, QC
G1X 4G3



**4 Festo United States
Headquarters**
Festo Corporation
395 Moreland Road
Hauppauge, NY
11788

5 Appleton
North 922 Tower View Drive, Suite N
Greenville, WI
54942

7 Detroit
1441 West Long Lake Road
Troy, MI
48098

6 Chicago
85 W Algonquin - Suite 340
Arlington Heights, IL
60005

8 Silicon Valley
4935 Southfront Road, Suite F
Livermore, CA
94550

Festo Regional Contact Center

Canadian Customers

Commercial Support:

Tel: 1 877 GO FESTO (1 877 463 3786)

Fax: 1 877 FX FESTO (1 877 393 3786)

Email: festo.canada@ca.festo.com

Technical Support:

Tel: 1 866 GO FESTO (1 866 463 3786)

Fax: 1 877 FX FESTO (1 877 393 3786)

Email: technical.support@ca.festo.com

USA Customers

Commercial Support:

Tel: 1 800 99 FESTO (1 800 993 3786)

Fax: 1 800 96 FESTO (1 800 963 3786)

Email: customer.service@us.festo.com

Technical Support:

Tel: 1 866 GO FESTO (1 866 463 3786)

Fax: 1 800 96 FESTO (1 800 963 3786)

Email: product.support@us.festo.com

Subject to change

Internet: www.festo.com/us